
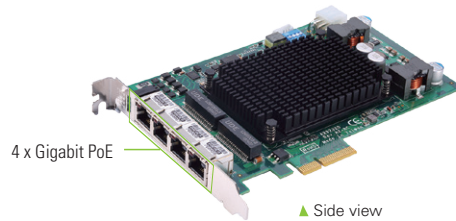


AX92320

2-port/4-port PCI Express GigE Frame Grabber Card

Features

- PCI Express x4 compliant
- 2 or 4 independent Gigabit PoE ports
- Supports 9.5KB Jumbo Frame and IEEE 1588
- Compliant with IEEE802.3at to deliver 30W at 54 VDC per port
- Up to 20/120W PoE power from PCIe 6-pin ATX power connector
- 0°C to +60°C operating temperature range
- PoE power management software
- Supports LAN port smart on/off

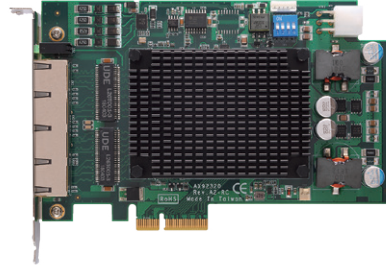

Introduction

The AX92320 PoE (Power over Ethernet) card supports 2 or 4 independent Gigabit PoE ports, providing up to 30W at 54 VDC of power per port. The AX92320 can fit in the PCI Express slot of any multi-channel vision control systems. It is designed to help customers develop and deploy machine vision and surveillance applications. Applications will greatly benefit through reduce cost, simpler installation and lower maintenance. Moreover, the AX92320 has a wide operating temperature of 0°C to 60°C (32°F to 140°F), making it suitable to be used in most severe environments.

Specifications

Ethernet Communications	
Ethernet Port	2 or 4 GbE LANs by Intel® i210-AT controller, support 9.5KB jumbo frame and IEEE 1588
PoE Capability	IEEE 802.3at compliant, each port delivers up to 30W at 54 VDC
Speed	10/100/1000 Mbps
Port Connector	8-pin RJ-45
Power Requirements	
Input Voltage	12 VDC or 24 VDC
Overload Protection	Yes
Connection	6-pin ATX power connector
Output PoE Power	Max. 20W w/ PCIe slot Max. 120W w/ 6-pin ATX power connector
Power Requirements	Power from PCIe slot (max. 20W PoE power output) 2.1A @ +12V 1.2A @ +3.3V Power from ATX power connector (max. 120W PoE power output) 12A @ +12V or 6A @ +24V 1.2A @ +3.3V (from PCIe slot)
General Specifications	
Bus Type	PCI Express x4
Operating Temperature	0°C to +60°C (+32°F to +140°F) (with air flow)
Storage Temperature	-20°C to +80°C (-4°F to +176°F)
Humidity	5% to 95%, non-condensing
Dimensions (W x D)	168 x 111 mm
EOS Support	Windows® 7/10 (32/64-bit)

Ordering Information

AX92320-2GbE (P/N: E392320103)	2-port PCI Express GigE frame grabber card
AX92320-4GbE (P/N: E392320100)	4-port PCI Express GigE frame grabber card
PoE Power Cable (P/N: 59492320700E)	4P 3.0/6P 4.2, L=10 cm (only be used with IPC962, IPC964 & IPC974)
Power Cable (P/N: 59492320730E)	6-pin ATX to Molex 4-pin power cable, L=150 mm (used for ATX power)

Packing list

Standard
User's manual, utility, CD and I/O bracket