



DSB550-880

High Performance Digital Signage Player
Supports 4th Gen Intel® Core™ i5 processor
onboard

NEW

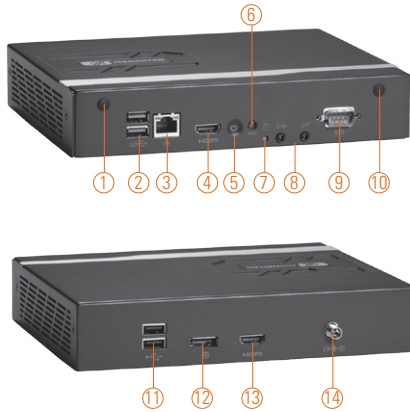

- | | | |
|----------------------------|---------------------------------|-----------------|
| 1. WiFi antenna (optional) | 6. Reset button | 11. USB 2.0 x 2 |
| 2. USB 3.0 x 2 | 7. HDD LED | 12. DisplayPort |
| 3. Ethernet | 8. Audio (Line-out/Mic-in) | 13. HDMI |
| 4. 4K HDMI | 9. RS-232 (COM 2) | 14. 19V DC in |
| 5. Power button | 10. 3G & WiFi module (optional) | |



Specifications

Standard Color	Black/Grey
Construction	Heavy-duty steel
CPU	Supports 4th Gen Intel® Core™ i5/ i3 processors (Haswell)
Chipset	Intel® QM87 PCH
System Memory	1 x 204-pin DDR3L-1066/1333/1600 SO-DIMM max. up to 8 GB
Storage	1 x 2.5" SATA HDD 1 x m-SATA
BIOS	AMI UEFI BIOS
System I/O Outlet	1 x DisplayPort 2 x USB 3.0 2 x USB 2.0 1 x Audio (Line-out/Mic-in) 2 x HDMI (Front HDMI port: support 4K2K) 1 x 10/100/1000Mbps Ethernet 1 x RS-232 (COM 2) 1 x power on/off button 1 x reset button
Indicator	1 x LED for system power ON, 1 x LED for HDD
WiFi	Optional 802.11 b/g/n
Expansion Slot	2 x PCI Express Mini Card
Operating Temperature	0°C ~ +40°C (+32°F ~ +104°F)
Dimensions	TBD
Packing Dimensions	TBD
Weight (net/gross)	TBD
Certification	CE

Features

- Supports 4th Gen Intel® Core™ i5 processor onboard (Haswell)
- Intel® QM87 chipset
- DDR3L-1066/1333/1600 SO-DIMM max. up to 8 GB
- Optional 3G & wireless LAN module
- 1 DisplayPort, 2 HDMI
- One 2.5" SATA HDD
- Supports Intel® AMT (Active Management Technology) 9.0
- Supports wall mount and VESA mount
- Supports 2 USB 3.0 ports
- One m-SATA

Optional EOS Installation

Windows® XP Embedded

Optional OS Installation

Windows® XP, Windows® 7, Windows® Embedded 8

Ordering Information

Standard

DSB550-880	High performance digital signage player supports Supports 4th Gen Intel® Core™ i5 processor
------------	---

Optional

Wireless Lan kit	Wi-Fi module and antenna
VESA mount kit	
Wall mount kit	

* Specification and certifications are based on options and may vary.