

EX89000 Series

IEC61850-3/IEEE1613 Modulized Hardened Managed 24-port 10/100BASE and 4-port Gigabit Ethernet Switch with SFP options



Overview

EtherWAN's EX89000 Series provides a Hardened Fully Managed 28-port switching platform combining high performance switching backbone with robust and secure management features required for mission critical and harsh environments where sustained connectivity is crucial.

Highly modulized, the EX89000 switch supports up to 28 electrical and/or optical interfaces with data transfer rates of 10/100 Mbps and up to four Gigabit, Fixed Fiber, or SFP Combo port options. Mountable on a 1U rack, the EX89000 Series is equipped with EtherWAN's Alpha-Ring self-healing technology, providing less than 15ms fault recovery time making it ideal for applications intolerant to interruption.

Users are able to access management features such as port security, IGMP snooping, VLANs, GARP protocols, LACP, and GOOSE messaging to name a few, via web browser, Telnet, SNMP, RMON, TFTP, and RS-232 console interfaces. With its hardened-grade specifications and IEC61850 & IEEE1613 certifications, the EX89000 Series is capable of operating under high EMI environments at the temperatures ranging from -40°C to 75°C , making it an ideal choice for harsh applications.

EtherWAN—"When Connectivity is Crucial."

Spotlight

• Versatile Connectivity

- Modulized 24-port 10/100BASE-TX/FX/BX and 4-port Gigabit-TX/SX/LX/BX/SFP

• Hardened Grade

- Wide operating temperature range for extreme environments
- Fanless and ruggedized housing
- High shock and electric noise immunity

• IEC61850-3 & IEEE1613 Certified

- Meets the standards for operating in power substation zones

Software Features

Management

- Interface
 - CLI, Telnet and Web Browser
 - SNMP v1/v2c/v3
- Firmware and configuration upgrade and backup via TFTP
- Supports DHCP Server/Client
- RMON (Remote monitoring)
- Port mirroring: TX/RX and both
- NTP (Network Time Protocol) time synchronization

Security

- MAC Address by port security
- Enable/disable port
- Storm control (broadcast and multicast types)
- IEEE802.1x LAN access control
- Remote authentication through RADIUS

Quality of Service (QoS)

- Priority Queues: 4 queues per port
- Traffic classification based on IEEE802.1p CoS, DSCP, WRR (Weighted round robin) and strict mode
- Rate Limiting (Ingress/Egress)

Layer 2 Features

- Auto-negotiation for port speed and duplex mode
- Flow Control
 - IEEE802.3x full duplex mode
 - Back-Pressure half duplex mode
- Redundant Protocol
 - IEEE802.1D Spanning Tree Protocol (STP)
 - IEEE802.1w Rapid Spanning Tree Protocol (RSTP)
 - IEEE802.1s Multiple Spanning Tree Protocol (MSTP)
 - Supports EtherWAN's Alpha-Ring topology for less than 15ms fault recovery time
- VLANs
 - Port-based VLANs
 - IEEE802.1Q Tag VLANs (128 groups, 4096 VID)
 - GVRP (GARP VLAN Registration Protocol)
 - GMRP (GARP Multicast Registration Protocol)
- Link Aggregation
 - Static Trunk (8 groups, support MAC base)
 - IEEE802.3ad Link Aggregation Control Protocol
- IGMP Snooping
 - IGMP snooping v1/v2/v3

Performance

- Switching Capability: 12.8Gbps
- Packet Buffer Size: 3M bits
- MAC Address Table: 8192

Hardware Specifications

Technology

Standards

- IEEE802.3 10BASE-T
- IEEE802.3u 100BASE-TX/100BASE-FX
- IEEE802.3ab 1000BASE-T
- IEEE802.3z 1000BASE-SX/1000BASE-LX
- IEEE802.3x Full duplex and flow control
- IEEE802.1p QoS
- IEEE802.1Q Tag VLANs
- IEEE802.1w RSTP
- IEEE802.1x Port-based Network Access Control

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps
- 1,488,100pps for 1000Mbps

Packet Buffer Memory

- 3M bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

- 8192 MAC addresses

Power

Input

- (T) : $\pm 48\text{VDC}$ (36–75VDC) Internal Universal PSU
- (W) : 88–370VDC and 90–264VAC Internal Universal PSU
- (C) : 90–264VAC, 50–60Hz Internal Universal PSU
- (TR) : $\pm 48\text{VDC}$ Redundant (Terminal Block)
- (WR) : 88–370VDC and 90–264VAC Redundant (Terminal Block)
- (CR): 90–264VAC Redundant (AC Inlet)

Power Consumption

- 42.7W Max.

Protection

- Overload Current Protection

Mechanical

Casing

- Metal Case
- IP30

Dimensions

- Single Power:
442mm (W) x 343mm (D) x 44.2mm (H)
(17.4" (W) x 13.5" (D) x 1.74" (H))
- Redundant Power:
442mm (W) x 404mm (D) x 44.2mm (H)
(17.4" (W) x 15.9" (D) x 1.74" (H))

Weight

- Single Power: 4.5Kg (9.9lbs.)
- Redundant Power: 4.6 kg (10.1 lbs.)

Installation

- Rack mounting

Interface

Ethernet Port

- 10/100BASE-TX: 24, 16, 8 or 0 port
- 100BASE-FX: 0 to 18 ports
- Gigabit: 0, 2 or 4 ports

Console Port

- Port: One DB9 RS-232 port

LED Indicators

- Per Unit: Power
- Per Port: Link/Activity (Green)
- Per SFP slot: Selected/Unselected (Green)

Environment

Operating Temperature

- -40°C to 75°C (-40°F to 167°F)
Tested @ -40°C to 85°C (-40°F to 185°F)

Storage Temperature

- -45°C to 85°C (-49°F to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO

- Manufactured in an ISO9001 facility

EMI

FCC Part 15B, Class A

EN61000-6-4

EN55022

EN61000-3-2

EN61000-3-3

EMS

EN61000-6-2

- EN61000-4-2 (ESD Standards)
- EN61000-4-3 (Radiated RFI Standards)
- EN61000-4-4 (Burst Standards)
- EN61000-4-5 (Surge Standards)
- EN61000-4-6 (Induced RFI Standards)
- EN61000-4-8 (Magnetic Field Standards)
- IEC61000-4-10 (Oscillatory wave magnetic field test)
- IEC61000-4-16 (Power frequency immunity test)
- IEC61000-4-18 (Oscillatory wave immunity test)

Environmental Test Compliance

IEC60068-2-6 Fc (Vibration Resistance)

IEC60068-2-27 Ea (Shock)


FED STD 101C Method 5007.1 (Free fall w/ package)

Industrial Compliance


IEEE61850-3 / IEEE1613

EN50121-4

Application Diagram

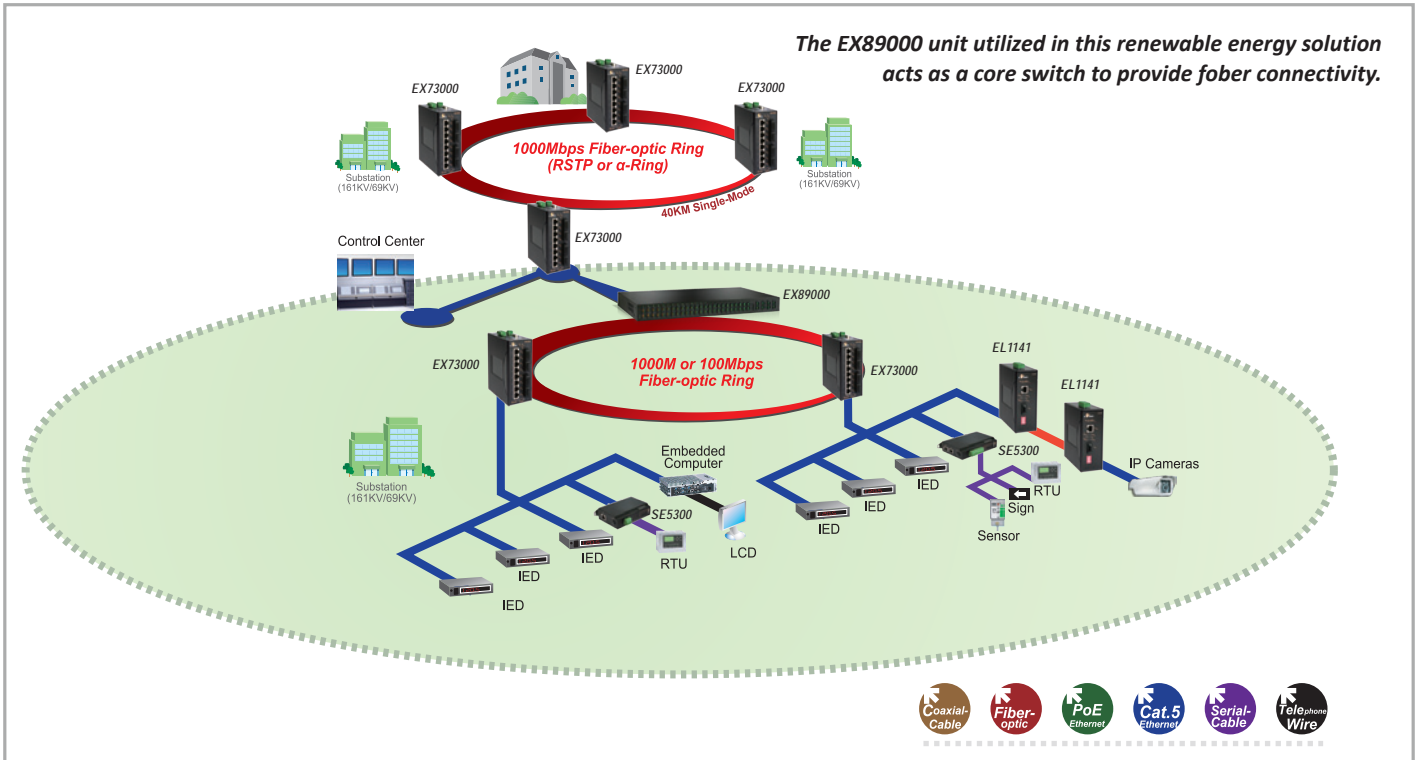

Dimensions

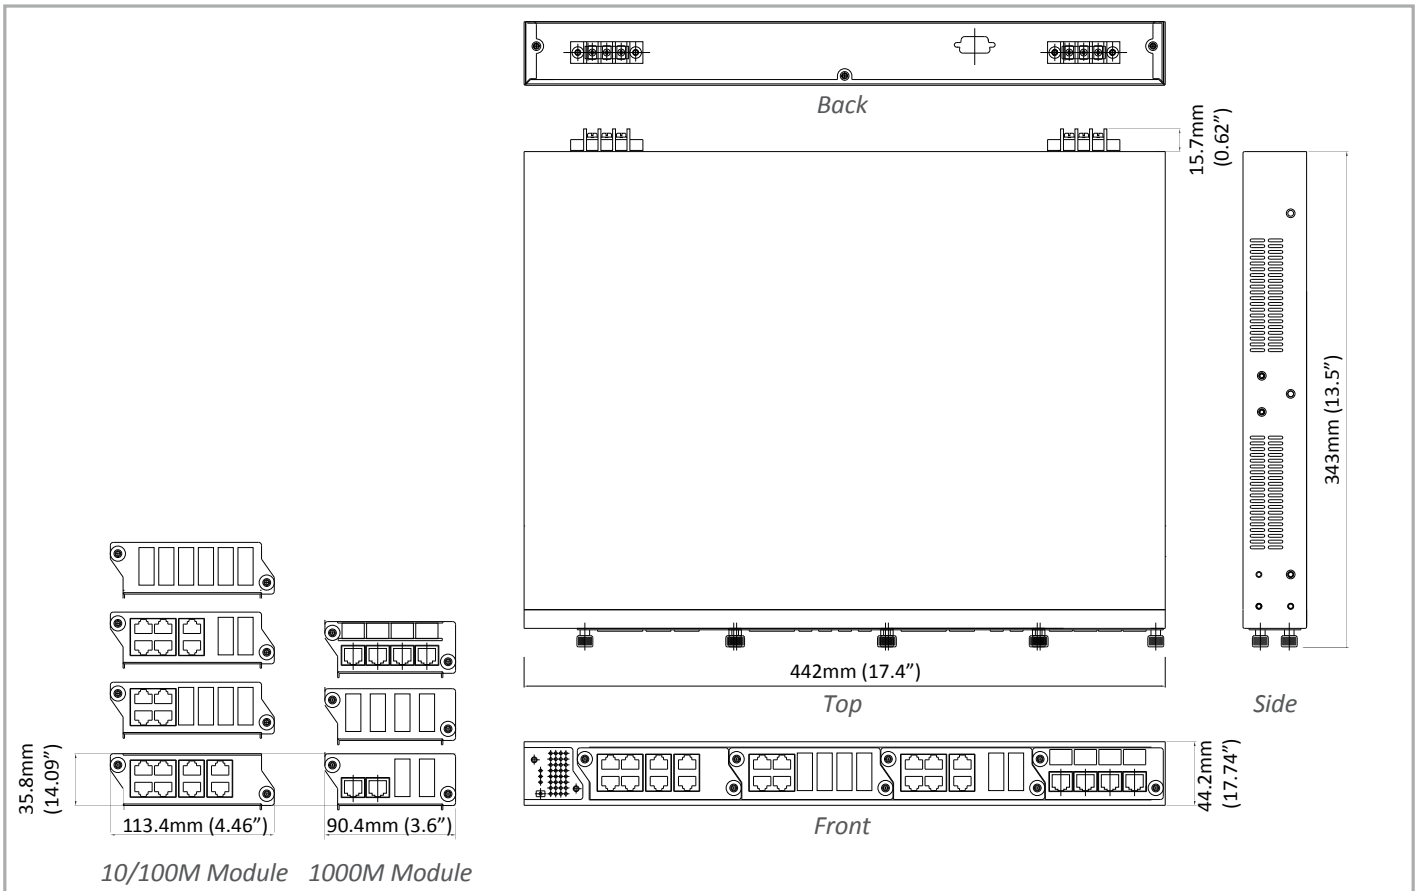

Ordering Information

Model

EX89000-00Z	Rack mount chassis with integrated power supply for four M89000 modules
--------------------	---

* Rack mounting kit included

Modules for EX89000 Series

Model	Description	Slot 1	Slot 2	Slot 3	Slot 4
M89800-000	8-Port 10/100BASE TX	✓	✓	✓	
M89620-W00	6-Port 10/100BASE TX + 2-Port 100BASE FX	✓	✓	✓	
M89420-W00	4-Port 10/100BASE TX + 2-Port 100BASE FX	✓	✓	✓	
M89060-W00	6-Port 10/100BASE FX	✓	✓	✓	
M89240-W00	2-Port 10/100BASE TX + 4-Port 100BASE FX	✓	✓	✓	
M89440-W00	4-Port 10/100BASE TX + 4-Port 100BASE FX	✓	✓	✓	
M89004-0XY	4-Port Gigabit				✓

100FX Fiber Options (W)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
6	Multi Mode (SC) WDM-TX:1310nm/RX:1550nm - 2Km
7	Multi Mode (SC) WDM-TX:1550nm/RX:1310nm - 2Km
8	Multi Mode (SC) WDM-TX:1310nm/RX:1550nm - 5Km
9	Multi Mode (SC) WDM-TX:1550nm/RX:1310nm - 5Km
A	Single Mode (SC) - 20Km
B	Single Mode (SC) - 40Km
F	Single Mode (FC) - 20Km
H	Single Mode (ST) - 20Km
P	Single Mode (SC) WDM-TX:1310nm/RX:1550nm - 20Km
Q	Single Mode (SC) WDM-TX:1550nm/RX:1310nm - 20Km
R	Single Mode (SC) WDM-TX:1310nm/RX:1550nm - 40Km
S	Single Mode (SC) WDM-TX:1550nm/RX:1310nm - 40Km

*More 100FX Fiber options also available upon request.

Numbers of fixed Gigabit Fiber (X)

0	None
4	Four Gigabit Fiber Ports

Gigabit Port Options (Y)

1	10/100/1000BASE-TX
3	1000BASE-SX (SC) - 550m
4	1000BASE-SX (SC) - 2Km
5	1000BASE-SX (ST) - 550m
A	1000BASE-LX (SC) - 10Km
B	1000BASE-LX (SC) - 20Km
R	1000BASE-BX (SC) WDM-TX:1310nm/RX: 1550nm - 20Km
S	1000BASE-BX (SC) WDM-TX:1550nm/RX: 1310nm - 20Km
V	4-port 1000BASE SFP Combo with 10/100/1000BASE-TX

* More Gigabit options also available upon request.

Power Input Interface (Z)

T	±48VDC (Terminal Block)
W	88 - 370VDC and 90 - 264VAC (Terminal Block)
C	90 - 264VAC Redundant (AC Inlet)
TR	±48VDC Redundant (Terminal Block)
WR	88 - 370VDC and 90 - 264VAC Redundant
CR	90 - 264VAC Redundant (AC Inlet)