





B360 PLUS FULLY RUGGED LAPTOP



- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 13.3" FHD LumiBond display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- Enhanced enterprise security with integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport battery swappable technology
- Versatile I/O options including up to two Thunderbolt™ 4 and docking solutions
















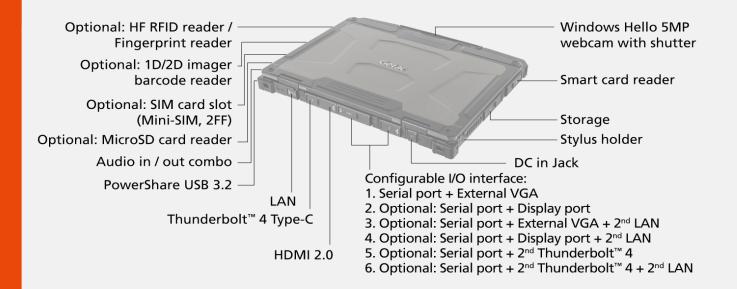

SPECIFICATIONS

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ Ultra 5 processor 226V 16GB Max. 4.5GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Platform options: Intel® Core™ Ultra 5 processor 228V 32GB Max. 4,5GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Intel® Core™ Ultra 5 processor 236V 16GB, vPro® Enterprise Max. 4.7GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Intel® Core™ Ultra 5 processor 238V 32GB, vPro® Enterprise Max. 4.7GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 256V 16GB Max. 4.8GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 258V 32GB Max. 4.8GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 266V 16GB, vPro® Enterprise Max. 5.0GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 268V 32GB, vPro® Enterprise Max. 5.0GHz with Intel® Turbo Boost Technology - 12MB Intel® Smart Cache

Graphics

Intel® Arc™ 130V GPU (For Intel® Core™ Ultra 5 processor) i Intel® Arc™ 140V GPU (For Intel® Core™ Ultra 7 processor) i

Intel® AI Boost (Up to 48 TOPS)

Display
13.3* Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film
1,400 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

16GB LPDDR5X (Memory on Package) Optional: 32GB LPDDR5X (Memory on Package)

256GB PCIe NVMe SSD Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

LED backlit membrane keyboard

Pointing Device

Touchscreen - Capacitive multi-touch screen

Touchpad - Touchpad with two buttons

Audio Integrated stereo speakers Integrated dual-array microphone

Expansion Slot

Smart card reader x 1
Optional: MicroSD card reader x 1
Optional: 1D/2D imager barcode reader

I/O Interface

Windows Hello face-authentication 5MP camera (front-facing) x 1
Audio in/out combo x 1
DC in Jack x 1
PowerShare USB 3.2 x 1
Thunderbolt™ 4 Type-C x 1
LAN (R145) x 1
PDMI 2.0 x 1
PowerShare appearance 1

Docking connector x 1 Optional: SIM card slot x 1 (Mini-SIM, 2FF) ^{II} Optional: RF antenna pass-through for GPS, WWAN and WLAN

Configurable I/O options

Configurable I/O options ^{III}:

1. Serial port (9-pin; D-sub) x 1
External VGA (15-pin; D-sub) x 1
2. Serial port (9-pin; D-sub) x 1
3. Serial port (9-pin; D-sub) x 1
External VGA (15-pin; D-sub) x 1
Eximal port (9-pin; D-sub) x 1
Exima

Kensington Lock

Communication Interface

10/100/1000 base-T Ethernet
Intel® Wi-Fi 7 BE201, 802.11be
Bluetooth (v5.4) *\times 0ptional: Dedicated GPS with L1/L5 *\times 0ptional: Dedicated GPS with L1/L5 *\times 0ptional: 4G LTE mobile broadband with integrated L1/L5 GPS *\times 0ptional: 5G Sub-6 with integrated L1/L5 GPS *\times 0ptional: Dual SIM (Mini-SIM 2FF and e-SIM) *\times visit optional: Dual

Security Feature

TPM 2.0
Kensington lock
Smart card reader
Getac Disk Wipe
Optional: Fingerprint reader
Optional: HF RFID reader wil as
Optional: Absolute Persistence®

Power

AC adapter (90W, 100-240VAC, 50/60Hz) Li-ion battery (7.72V, typical 4060mAh; min. 3857mAh) x 2 LifeSupport battery swappable technology Dimension (W x D x H) & Weight 342 x 281 x 34.9mm (13.46* x 11.06* x 1.37*) 2.32kg (5.11lbs) *

Rugged Feature

MIL-STD-810H certified MIL-S1D-81UH certineu
P66 certified xil
Vibration & 6ft (1.8m) drop resistant
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D) xii
Optional: Salt fog certified

Environmental Specification

Temperature xi emperature *** : Operating: -29°C to 63°C / -20°F to 145°F Storage: -51°C to 71°C / -60°F to 160°F - Storage: -51°C to 71°C / -6 Humidity: - 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Geolocation
Getac Barcode Manager xiv
Optional: Absolute Secure Endpoint
Optional: Absolute Secure Access

Optional Software

Getac Driving Safety Utility Getac VGPS Utility **

Accessories

Li-ion battery (7.72V, typical 4060mAh; min. 3857mAh) AC adapter (90W, 100-240VAC) Capacitive stylus with tether

Optional:

Optional:
Carry bag
Multi-Bay
Multi-Bay charger (Eight-Bay)
Multi-Bay charger (Eight-Bay)
Multi-Bay charger (Eight-Bay)
Ac adapter (90W, 100-240VAC)
Office dock Ac adapter (120W, 100-240VAC)
Multi-STD-451 AC adapter (90W, 100-240VAC)
C-Dvehicle adapter (120W, 11-32VDC)
Control of the second of t

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Office Dock

Standard 3 years Bumper-to-Bumper

B360 PLUS FULLY RUGGED LAPTOP

- Units equipped with 16GB and dual channel memory come with Intel® Arc^ Graphics. Units with 4G/5G option come with an embedded SIM card slot.
- Units with 4G/SG option come with an embedded SIM card slot. External VGA, Display port, and 2nd Thunderbolt™ 4 Type-C are mutually exclusive.

 Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.

 Support GPS, GLONASS, Galileo, BeiDou and QZSS.

 Only available in the US_IIK_FIL_Australia and New Zealand.

- Sonja varialable in the US, UK, EU, Australia, and New Zealand.

 One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.

 Fingerprint reader and HF RFID reader are mutually exclusive.

 HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- Χ.
- Weight and dimensions vary from configurations and optional accessories.
- MIL-STD-461 90W AC adapter sold separately.
- Available with limited configurations and environment conditions.
- XIII. Tested by an independent third-party test lab following MIL-STD-810H.
- Available when barcode reader option is selected.

 Models require either embedded or standalone GPS module.
- XVI. Gamber Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

988FiELDWDRI

Fieldworks Direct BV Veemarktkade 8 NL-5222 AE 's-Hertogenbosch e-mail: info@fieldworks.nl tel. +31(0) 73 624 1111 fax +31(0) 73 624 1112

■ www.fieldworks.nl




5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist., Taipei City, 115018, Taiwan, R.O.C. Tel: +886 2 2785 7888 globalmarketing@getac.com | www.getac.com

GETAC TECHNOLOGY CORPORATION

Getac

Copyright © 2025 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

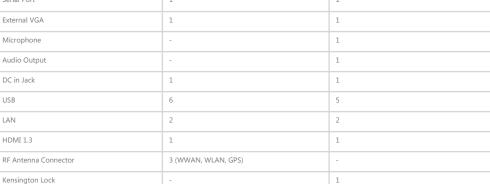

Vehicle Dock