


# B360 Pro FULLY RUGGED LAPTOP

- AI-ready with the latest Intel® Core™ Ultra Processors (Series 2) and Intel® AI Boost technology
- Optional NVIDIA® Quadro® RTX A500 4GB discrete graphic controller
- MIL-STD 810H, 6ft operating drop rating, IP66 certified, and optional salt fog resistant
- 13.3" FHD LumiBond display with Getac sunlight readable technology (1,400 nits) and capacitive touchscreen
- Enhanced enterprise security with optional dual user replaceable storage, Windows Hello face-authentication camera, integrated 1D/2D imager barcode reader and multi-factor authentication options
- LifeSupport battery swappable technology

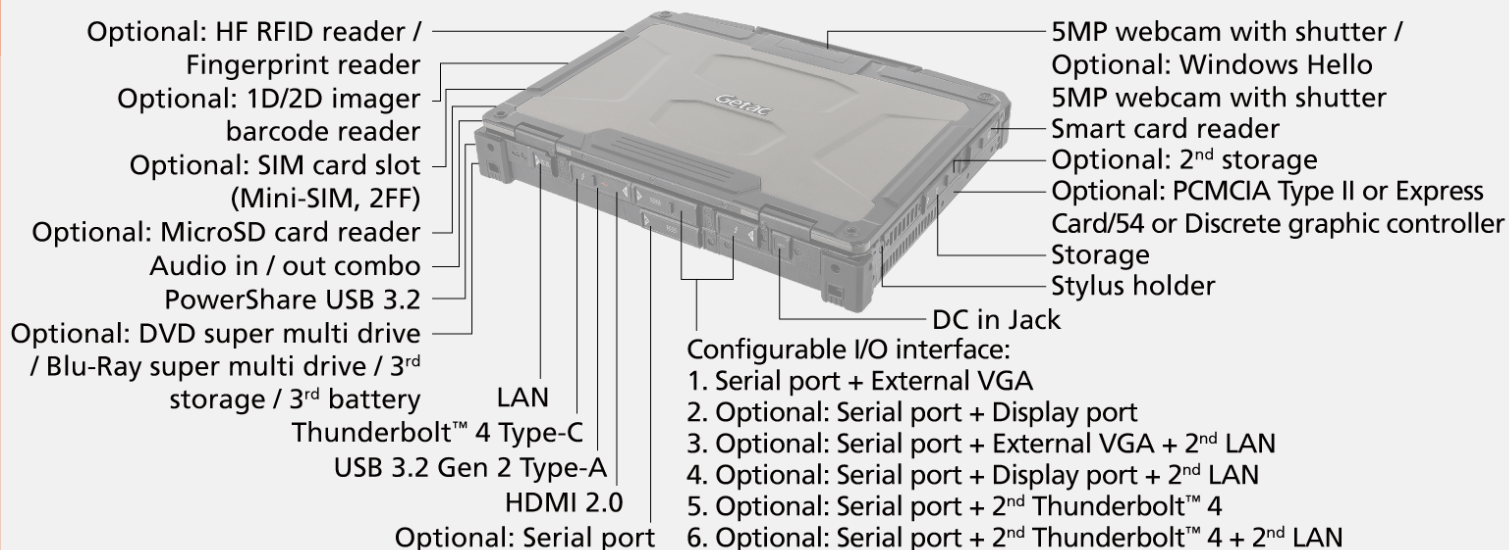

SPECIFICATIONS

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ Ultra 5 processor 225H  
Max. 4.9GHz with Intel® Turbo Boost Technology  
- 18MB Intel® Smart Cache

Platform options:

Intel® Core™ Ultra 5 processor 235H, vPro® Enterprise  
Max. 5.0GHz with Intel® Turbo Boost Technology  
- 18MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 255H  
Max. 5.1GHz with Intel® Turbo Boost Technology  
- 24MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 265H, vPro® Enterprise  
Max. 5.3GHz with Intel® Turbo Boost Technology  
- 24MB Intel® Smart Cache

Graphics

Intel® Arc™ Graphics <sup>i</sup>  
Optional: NVIDIA® Quadro®  
RTX A500 4GB discrete graphic controller <sup>ii, iii</sup>

NPU

Intel® AI Boost

Display

13.3" Wide Viewing Angle TFT LCD FHD (1920 x 1080)  
Protection film  
1,400 nits LumiBond display with  
Getac sunlight readable technology  
Capacitive multi-touch screen

Storage & Memory

16GB DDR5  
Optional: 32GB / 64GB DDR5

256GB PCIe NVMe SSD  
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional 2<sup>nd</sup> storage <sup>iv</sup>:  
256GB / 512GB / 1TB / 2TB PCIe NVMe SSD  
Optional multimedia bay storage : 1TB / 2TB SATA SSD

Keyboard

LED backlit membrane keyboard

Pointing Device

Touchscreen  
- Capacitive multi-touch screen

Touchpad  
- Touchpad with two buttons

Expansion Slot

Smart card reader x 1  
Optional: Micro SD card reader x 1  
Optional: Discrete graphics controller, or PCMCIA Type II,  
or ExpressCard/54 <sup>iii</sup>  
Optional: 1D/2D imager barcode reader

Multimedia Bay

Configurable options <sup>v, vi</sup> :  
1. Optional: DVD super multi drive, or Blu-Ray super multi drive,  
or 3<sup>rd</sup> storage  
2. Optional: 3<sup>rd</sup> battery

I/O Interface

5MP webcam x 1 <sup>vii</sup>  
Audio in/out combo x 1  
DC in Jack x 1  
PowerShare USB 3.2 x 1  
USB 3.2 Gen 2 Type-A x 1  
Thunderbolt™ 4 Type-C x 1 <sup>viii</sup>  
LAN (RJ45) x 1  
HDMI 2.0 x 1  
Docking connector x 1  
Optional: SIM card slot x 1 (Mini-SIM, 2FF) <sup>ix</sup>  
Optional: Windows Hello face-authentication  
5MP camera (front-facing) x 1 <sup>viii</sup>  
Optional: RF antenna pass-through for GPS, WWAN and WLAN

Configurable I/O options <sup>x</sup>:

- 1. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1
- 2. Serial port (9-pin; D-sub) x 1 + Display port x 1
- 3. Serial port (9-pin; D-sub) x 1 + External VGA (15-pin; D-sub) x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
- 4. Serial port (9-pin; D-sub) x 1 + Display port x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
- 5. Serial port (9-pin; D-sub) x 1 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1
- 6. Serial port (9-pin; D-sub) x 1 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
- 7. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1
- 8. Serial port (9-pin; D-sub) x 2 + Display port x 1
- 9. Serial port (9-pin; D-sub) x 2 + External VGA (15-pin; D-sub) x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
- 10. Serial port (9-pin; D-sub) x 2 + Display port x 1 + 2<sup>nd</sup> LAN (RJ45) x 1
- 11. Serial port (9-pin; D-sub) x 2 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1
- 12. Serial port (9-pin; D-sub) x 2 + 2<sup>nd</sup> Thunderbolt™ 4 Type-C x 1 + 2<sup>nd</sup> LAN (RJ45) x 1

Communication Interface

	Vehicle Dock	Office Dock
Bluetooth® (V5.4) <sup>xi</sup> Optional: Dedicated GPS with L1/L5 <sup>xii</sup> Optional: 4G LTE mobile broadband with integrated L1/L5 GPS <sup>xiii</sup> Optional: 5G Sub-6 with integrated L1/L5 GPS <sup>xii, xiii</sup> Optional: Dual SIM (Mini-SIM 2FF and e-SIM) <sup>ix, xiv</sup>	1	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	6	5
LAN	2	2
HDMI 1.3	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-

Security Feature

TPM 2.0  
Kensington lock  
Smart card reader  
Optional: Fingerprint reader <sup>xv</sup>  
Optional: HF RFID reader <sup>xv, xvi</sup>  
Optional: Absolute Secure Access

Power

AC adapter (90W, 100-240VAC, 50/60Hz)  
AC adapter (120W, 100-240VAC, 50/60Hz) <sup>ii</sup>  
High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh) x 2  
Optional: Multimedia bay battery (11.1V, typical 4200mAh; min. 2080mAh) x 1  
LifeSupport battery swappable technology

Dimension (W x D x H) & Weight

342 x 281 x 53.5mm (13.46" x 11.06" x 2.11")  
3.08kg (6.79lbs) <sup>xviii</sup>

Rugged Feature

MIL-STD-810H certified  
IP66 certified  
MIL-STD-461G certified <sup>xviii</sup>  
Vibration & 6ft (1.8m) drop resistant  
Optional: ANSI/UL 121201, CSA C22.2 NO. 213  
(Class I, Division 2, Groups A, B, C, D) <sup>xix</sup>  
Optional: Salt fog certified

Environmental Specification

Temperature <sup>xx</sup> :  
- Operating: -29°C to 63°C / -20°F to 145°F <sup>xxi</sup>  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

Pre-installed Software

Getac Utility  
Getac Geolocation  
Getac Barcode Manager <sup>xxii</sup>  
Optional: Absolute Secure Endpoint  
Optional: Absolute Secure Access

Optional Software

Getac Driving Safety Utility  
Getac Device Monitoring System (GDMS)  
Getac VGPS Utility <sup>xxiii</sup>

Accessories

High capacity Li-ion battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (90W, 100-240VAC)  
Capacitive stylus with tether

Optional:

Carry bag  
High Capacity Li-ion Battery (10.8V, typical 6900mAh; min. 6600mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (90W, 100-240VAC)  
AC adapter (120W, 100-240VAC) <sup>ii</sup>  
MIL-STD-461 AC adapter (90W, 100-240VAC)  
DC-DC vehicle adapter (120W, 11-32VDC)  
Capacitive stylus with tether  
Protection film  
Vehicle cradle <sup>xxiv</sup>  
Vehicle dock <sup>xxiv</sup>  
Office dock  
Spare SSD kit  
100W Type-C adapter <sup>xxv</sup>

Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

B360 Pro FULLY RUGGED LAPTOP

- I. Units equipped with 16GB and dual channel memory come with Intel® Arc™ Graphics.
- II. 120W AC adapter is used for office dock and for device configured with discrete graphics card.
- III. Discrete graphics card, PCMCIA slot, and Expresscard slot are mutually exclusive.
- IV. Second storage is optional and will be fitted with a removable cover when not chosen at point of purchase.
- V. Option 1 and 2 are mutually exclusive.
- VI. Factory option. Not user swappable.
- VII. 5MP webcam and optional Windows Hello face-authentication 5MP camera (front-facing) are mutually exclusive options.
- VIII. The configuration with a discrete graphic controller does not support USB-C power delivery function.
- IX. Units with 4G/5G option come with an embedded SIM card slot.
- X. External VGA, Display port, and 2<sup>nd</sup> Thunderbolt™ 4 Type-C are mutually exclusive.
- XI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- XII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- XIII. Only available in the US, UK, EU, Australia, and New Zealand.
- XIV. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- XV. Fingerprint reader and HF RFID reader are mutually exclusive.
- XVI. HF (13.56MHz) combo HF RFID/NFC reader (iClass, HID Prox, ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- XVII. Weight and dimensions vary from configurations and optional accessories.
- XVIII. MIL-STD-461 90W AC adapter sold separately.
- XIX. Available with limited configurations and environment conditions.
- XX. Tested by an independent third-party test lab following MIL-STD-810H.
- XXI. For optional DVD / Blu-Ray super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XXII. Available when barcode reader option is selected.
- XXIII. Models require either embedded or standalone GPS module.
- XXIV. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XXV. Do not support the configurations with discrete graphics card.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.



Fieldworks Direct BV

Veemarktkade 8

NL-5222 AE 's-Hertogenbosch

e-mail: info@fieldworks.nl

tel. +31(0) 73 624 1111

fax +31(0) 73 624 1112

[www.fieldworks.nl](http://www.fieldworks.nl)



GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1,  
Nangang Rd., Nangang Dist., Taipei City,  
115018, Taiwan, R.O.C. Tel : +886 2 2785  
7888 globalmarketing@getac.com |  
www.getac.com  
Copyright © 2025 Getac Technology Corporation  
and/or any of its affiliates. All Rights Reserved.  
Information provided herewith is for reference  
only, available specification shall be subjected to  
quotation by request.