



X500 SERVER FULLY RUGGED MOBILE SERVER


- Intel® Xeon® Processor E3-1505M v6
- 15.6" TFT LCD FHD with Getac QuadraClear® Sunlight Readable Display
- NVIDIA® GeForce® GTX1050 4GB Discrete Graphic Controller
- Optional RAID expansion unit with up to 5TB storage capacity and RAID configurable 0,1,5



Multimedia Bay
2nd Battery



Multimedia Bay
2nd Storage

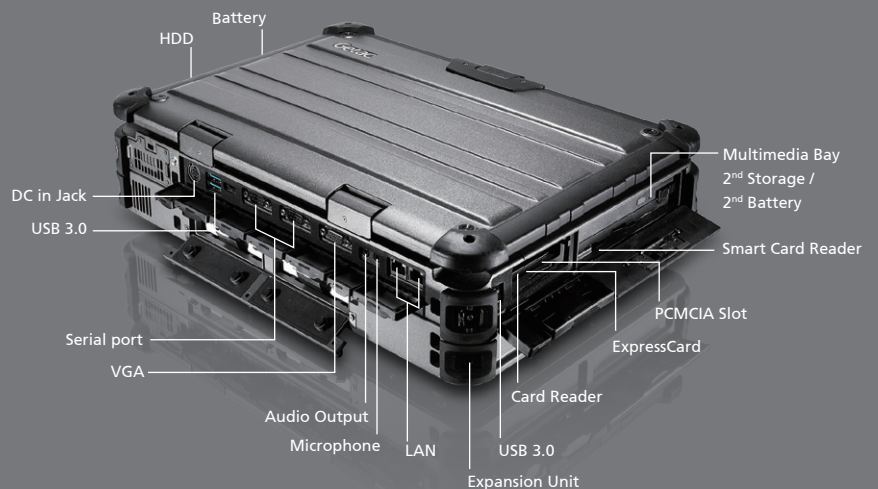

Specifications

Operating System

Windows server 2016

Mobile Computing Platform

Intel® Xeon® Processor E3-1505M v6 3.0GHz,

Max. 4.0GHz

- 8MB Intel® Smart Cache

VGA Controller

Intel® HD Graphics P630

NVIDIA® GeForce® GTX1050 4GB discrete graphic controller

Display

15.6" TFT LCD FHD (1920 x 1080)

1000 nits QuadraClear® sunlight readable display

Storage & Memory

32GB DDR4 expandable to 64GB

Optional 32GB DDR4 ECC expandable to 64GB

SATA HDD 500GB; Optional SATA HDD 1TB

Optional SATA SSD 512GB / 1TB

Disk management : RAID 0, RAID 1ⁱ

Keyboard

LED backlit membrane keyboard with integrated numeric keypad

Optional LED backlit rubber keyboard

Pointing Device

Touchpad

- Glide touchpad with scroll bar

Expansion Slot

PCMCIA Type II x 1

ExpressCard/54 x 1

Smart Card reader x 1

SD Card Reader x 1

Multimedia Bay

2nd storage: HDD 500GB

Optional 2nd storageⁱⁱ: HDD 1TB ; SSD 512 GB / 1TB

Optional 2nd batteryⁱⁱⁱ: 10.8V, 8700mAh

X Bay

Optional SATA HDD/SSD 3TB maximum expandable to 5TB

Disk management : RAID 0, RAID 1, RAID 5

I/O Interface

Serial port (9-pin; D-sub) x 2

External VGA (15-pin; D-sub) x 1

Microphone (Mini-jack) x 1

Audio output (Mini-jack) x 1

DC in Jack x 1

USB 3.0 x 4

LAN (RJ45) x 2

HDMI x 1

Communication Interface

10/100/1000 base-T Ethernet

Optional dedicated GPS

Security Feature

Intel® vPro™ Technology

TPM 2.0

Smart Card reader

Kensington lock

Power

AC adapter (150W, 100-240VAC, 50 / 60Hz)

Li-Ion smart battery (10.8V, 8700mAh)

Optional Multimedia Bay 2nd Li-Ion smart battery

(10.8V, 8700mAh)^{iv}

Dimension (W x D x H) & Weight

410 x 320 x 65 mm (16.1" x 12.6" x 2.5"),

5.2 kg (11.4 lbs)^{vi}

410 x 320 x 119 mm (16.1" x 12.6" x 4.6")^{iv},

8.6 kg (18.9 lbs)^{vi,iv}

Rugged Feature

MIL-STD-810G certified and IP65 certified

Full magnesium alloy case

Shock-protected removable HDD

Vibration & drop resistant

Environmental Specification

Temperature^{iv}:

- Operating: -20°C to 55°C / -4°F to 131°F

- Storage: -40°C to 71°C / -40°F to 160°F

Humidity:

- 95% RH, non-condensing

Software

Getac Utility

Getac Geolocation

Adaptec Storage Manager™ⁱⁱ

Optional Absolute DDS® Persistence

Accessories

Backpackⁱ

Multi-Bay Charger (Dual Bay)

Protection film

Main battery (10.8V, 8700mAh)

AC adapter (150W, 100-240VAC)

Multimedia bay 2nd battery (10.8V, 8700mAh)ⁱⁱ

Multimedia Bay 2nd HDDⁱⁱⁱ

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our new Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee.

That means you can depend on us to have your unit back in service within days.

Standard

5 years Bumper-to-Bumper

i 2nd multimedia HDD is required for RAID 0, RAID 1 configuration.

ii Software, hardware and accessories may vary depending on configuration.

iii Weight and dimensions vary from configurations and optional accessories. Depth including hard handle.

iv Dimension measured with expansion unit.

v Tested by a national independent third party test lab following MIL-STD-810G. Recommend system boot-up temperature below 40°C.

X500 SERVER

Fully Rugged Mobile Server



FIELDWORKS

Fieldworks Direct BV

Veemarktkade 8

NL-5222 AE 's-Hertogenbosch

e-mail: info@fieldworks.nl

tel. +31(0) 73 624 1111

fax +31(0) 73 624 1112

www.fieldworks.nl

Getac

GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1, Nangang Rd.,

Nangang Dist., Taipei City, 11568, Taiwan, R.O.C.

Tel : +886 2 2785 7888

globalmarketing@getac.com | www.getac.com



Copyright © 2019 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
Information provided herewith is for reference only,
available specification shall be subjected to quotation by request. V01M10Y19WW