




ZX10-EX FULLY RUGGED TABLET

- ATEX & IECEx Zone 2/22 explosive atmosphere certified
- Qualcomm® Snapdragon™ 660, Octa-core Processor
- 10.1" LumiBond display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- 6ft drop, MIL-STD-810H and IP66 certified
- Optional 1D/2D imager barcode reader
- Verified as Android enterprise recommended ^{viii}

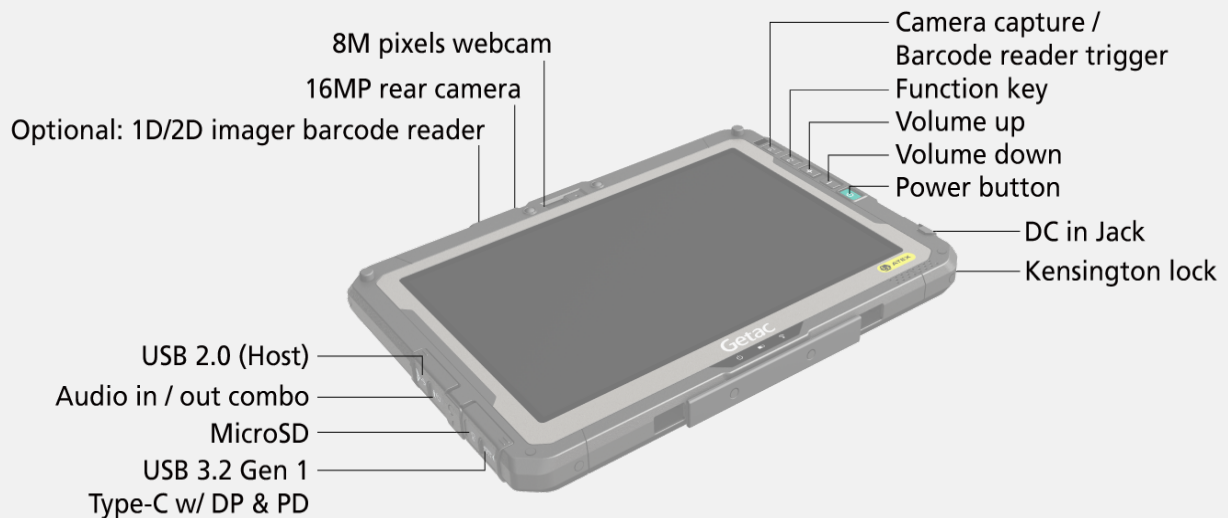

SPECIFICATIONS

Operating System

Android™ 12.0

Mobile Computing Platform

Qualcomm® Snapdragon™ 660, Octa-core
1.95GHz
Max. 2.2GHz

VGA Controller

Qualcomm® Adreno™ 512 GPU

Display

10.1" TFT LCD WUXGA (1920 x 1200)
Protection film
800 nits LumiBond display with Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

4GB LPDDR4, 64GB eMMC
Optional: 6GB LPDDR4, 128GB eMMC

Device Button

Power button
4 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen

Expansion Slot

Optional: 1D/2D imager barcode reader
Optional: Smart card reader
Optional: HF RFID/NFC combo reader ⁱ

I/O Interface

8M pixels webcam x 1
16M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 1 Type-C w/ DP & PD x 1
USB 2.0 (Host) x 1
MicroSD x 1

Communication Interface

Wi-Fi 802.11 a/b/g/n/ac
Bluetooth (v5.0) ⁱⁱ
Dual Micro SIM
Dedicated GPS
Optional: 4G LTE mobile broadband

Security Feature

Kensington lock
Optional: HF RFID/NFC combo reader ⁱ
Optional: Smart card reader

Power

AC adapter (65W, 100-240VAC, 50/60Hz)
Li-Ion smart battery (3.84V, typical 4990mAh;
min. 4870mAh) x 2
Optional: High capacity battery (3.84V, typical
9980mAh; min. 9470mAh) x 2

Dimension (W x D x H) & Weight

275 x 192 x 17.9mm (10.8 " x 7.56" x 0.7")
1.09kg (2.40lbs) ⁱⁱⁱ

Rugged Feature

MIL-STD-810H certified
IP66 certified
Vibration & 6 feet (1.8m) drop resistant
ATEX & IECEx certified

Environmental Specification

Temperature ^{iv}:
- Operating: -21°C to 55°C / -5.8°F to 131°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Explosion Protection

ATEX/IECEx Zone 2/22
Ex II 3G Ex ic op is IIC T4 Gc
Ex II 3D Ex ic op is IIC T130°C Dc

Pre-installed software

Getac Camera
Getac Input Method
Getac Driving Safety Utility (trial version)
Getac deployXpress (trial version)
Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, YouTube music, Google TV, Duo and photos)
Getac enrollXpress

Optional software

Getac Driving Safety Utility
Getac deployXpress
Getac OEMConfig

Accessories

Battery (3.84V, typical 4990mAh; min.
4870mAh)
AC adapter (65W, 100-240VAC, 50/60Hz)
Capacitive hard tip stylus & tether

Optional:

Carry bag
Battery (3.84V, typical 4990mAh; min.
4870mAh)
High capacity Li-ion battery (3.84V, typical
9980mAh; min. 9470mAh)
AC adapter (65W, 100-240VAC, 50/60Hz)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
100W Type-C AC adapter
Protection film
Rotating hand strap with kickstand
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Capacitive hard tip stylus & tether
Hard handle ^v

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

ZX10-EX FULLY RUGGED TABLET

- I. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- IV. Tested by an independent third-party test lab following MIL-STD-810H.
- V. Factory option. Not user-swappable.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

FIELDWORKS

Fieldworks Direct BV e-mail: info@fieldworks.nl
Veemarktkade 8 tel. +31(0) 73 624 1111
NL-5222 AE 's-Hertogenbosch fax +31(0) 73 624 1112

www.fieldworks.nl

Getac

GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1,
Nangang Rd., Nangang Dist., Taipei City,
115018, Taiwan, R.O.C. Tel : +886 2 2785
7888 globalmarketing@getac.com |
www.getac.com Copyright © 2023 Getac
Technology Corporation and/or any of its affiliates.
All Rights Reserved. Information provided herewith
is for reference only, available specification shall be
subjected to quotation by request.