




## ZX10 FULLY RUGGED TABLET

- Qualcomm® Snapdragon™ 660, Octa-core Processor
- 10.1" LumiBond® display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- Dual hot-swappable batteries for uninterrupted operation
- 6ft drop, MIL-STD-810H and IP66 certified
- Optional 1D/2D imager barcode reader
- Verified as Android enterprise recommended <sup>vi</sup>

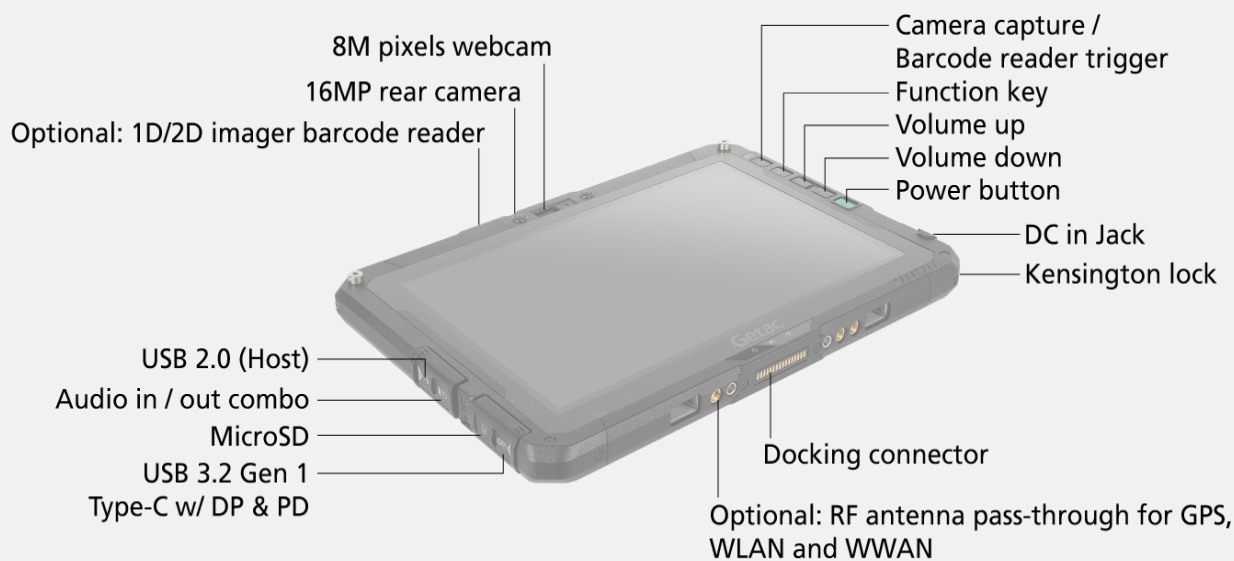

SPECIFICATIONS

Operating System

Android™ 12.0

Mobile Computing Platform

Qualcomm® Snapdragon™ 660, Octa-core  
1.95GHz  
Max. 2.2GHz

VGA Controller

Qualcomm® Adreno™ 512 GPU

Display

10.1" TFT LCD WUXGA (1920 x 1200)  
Protection film  
800 nits LumiBond® display with Getac sunlight readable technology  
Capacitive multi-touch screen

Storage & Memory

4GB LPDDR4, 64GB eMMC  
Optional: 6GB LPDDR4, 128GB eMMC

Device Button

Power button  
4 tablet programmable buttons

Pointing Device

Touchscreen  
- Capacitive multi-touch screen

Expansion Slot

Optional: 1D/2D imager barcode reader  
Optional: Smart card reader  
Optional: HF RFID/NFC combo reader <sup>i</sup>

I/O Interface

8M pixels webcam x 1  
16M pixels auto focus rear camera x 1  
Audio in/out combo x 1  
DC in Jack x 1  
USB 3.2 Gen 1 Type-C w/ DP & PD x 1  
USB 2.0 (Host) x 1  
MicroSD x 1  
Docking connector x 1  
Optional: SIM card slot x 2 (Micro-SIM, 3FF) <sup>vii</sup>  
Optional: RF antenna pass-through for GPS and WWAN

Communication Interface

Wi-Fi 802.11ac  
Bluetooth (v5.0) <sup>ii</sup>  
Dedicated GPS  
Optional: 4G LTE mobile broadband <sup>vii</sup>  
Dual Micro SIM <sup>viii</sup>

Security Feature

Kensington lock  
Optional: Smart card reader  
Optional: HF RFID/NFC combo reader <sup>i</sup>

Power

AC adapter (65W, 100-240VAC, 50/60Hz)  
Li-ion battery(3.84V,typical 4990mAh;min. 4870mAh)x 2  
LifeSupport™ battery swappable technology  
Optional: High capacity Li-ion battery (3.84V, typical 9980mAh; min. 9470mAh) x 2

Dimension (W x D x H) & Weight

275 x 192 x 17.9mm (10.8" x 7.56" x 0.7")  
1.04kg (2.29lbs) <sup>iii</sup>

Rugged Feature

MIL-STD-810H certified  
IP66 certified  
Vibration & 6 feet (1.8m) drop resistant  
Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)  
Optional: Salt fog certified

Environmental Specification

Temperature <sup>iv</sup>:  
- Operating: -29°C to 63°C / -20°F to 145°F  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

Pre-installed software

Getac Camera  
Getac Input Method  
Getac Driving Safety Utility (trial version)  
Getac deployXpress (trial version)  
Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, YouTube music, Google TV, Duo and photos)  
Getac enrollXpress

Optional software

Getac Driving Safety Utility  
Getac deployXpress  
Getac OEMConfig

Accessories

Battery (3.84V, typical 4990mAh; min. 4870mAh)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
Capacitive stylus with tether

Optional:

Carry bag  
Battery (3.84V, typical 4990mAh; min. 4870mAh)  
High capacity Li-ion battery (3.84V, typical 9980mAh; min. 9470mAh)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
AC adapter (65W, 100-240VAC, 50/60Hz)  
Office dock AC adapter (65W, 100-240VAC)  
DC-DC vehicle adapter (120W, 22-32VDC)  
Capacitive stylus with tether  
Protection film  
Hand strap  
Shoulder strap (2-point)  
Shoulder harness (4-point; handsfree)  
Vehicle dock <sup>v</sup>  
Office dock  
100W Type-C adapter  
Hard handle

Bumper-to-Bumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime. That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs. Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days. Standard 3 years Bumper-to-Bumper

ZX10 FULLY RUGGED TABLET

- I. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- IV. Tested by an independent third-party test lab following MIL-STD-810H.
- V. Gamber Johnson and Havis vehicle docks are e-mark certified.
- VI. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.
- VII. Units with 4G LTE option come with two embedded SIM card slots.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

**FIELDWORKS**

Fieldworks Direct BV e-mail: info@fieldworks.nl  
Veemarktkade 8 tel. +31(0) 73 624 1111  
NL-5222 AE 's-Hertogenbosch fax +31(0) 73 624 1112  
[www.fieldworks.nl](http://www.fieldworks.nl)

Office Dock (Pogo)	
Serial Port	-
Microphone	1
Audio Output	1
DC in Jack	1
USB	USB 2.0 x 3
LAN	1
HDMI	1
RF Pass-through	-
Kensington Lock	1

Getac

GETAC TECHNOLOGY CORPORATION

5F, Building A, No. 209, Section 1,  
Nangang Rd., Nangang Dist., Taipei City,  
115018, Taiwan, R.O.C. Tel : +886 2 2785  
7888 globalmarketing@getac.com l  
www.getac.com Copyright © 2022 Getac  
Technology Corporation and/or any of its affiliates.  
All Rights Reserved. Information provided herewith  
is for reference only,available specification shall be  
subjected to quotation by request.