



# CAN Series Products



## PCI CAN Communication Card



*PISO-CAN200-D*




*PISO-CAN200-T*

The PISO-CAN200 can represents an economic solution of an active CAN board. It has two independent CAN bus communication ports with 5-pin screw terminal connector or 9-pin male D-sub connector, and has the ability to cover a wide range of CAN applications. Besides, PISO-CAN200 uses the new CAN controller Phillips SJA1000T and transceiver 82C250, which provide bus arbitration, error detection with auto correction and re-transmission function. It can be installed in a 5 V PCI slot and supported truly “Plug & play”.


### Features

- Compatible with CAN 2.0 parts A and B
- Fully compatible with ISO 11898-2 standard
- Support CAN baud from 10 kbps ~ 1 Mbps
- 2500 Vrms photo couple isolation on the CAN bus
- Comply with 5 V, 33 MHz, 32-bit PCI bus
- Built-in jumper to select 120 Ω terminal resistor
- 3 kV galvanic isolation
- 2 independent CAN channels
- Direct memory mapping to the CAN controller
- Provide VB6.0, VC++6.0, Delphi, BCB6.0 demos
- LabView/DASYLab driver
- Driver support Windows 98/ME/NT/2K/XP


### Hardware architecture

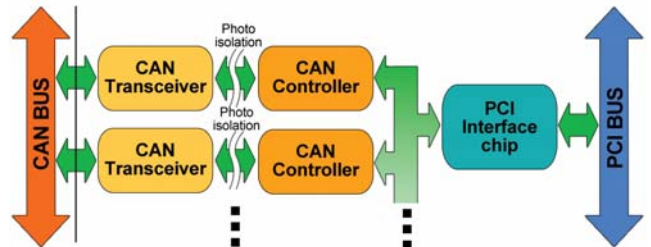

### Pin Assignments




9-pin D-sub male connector




5-pin Screw terminal connector

### Software Layer

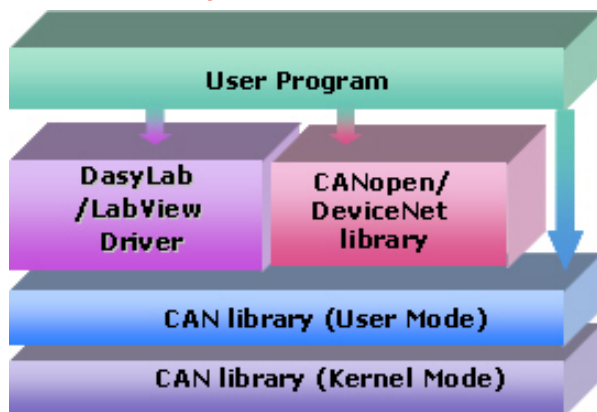


### Terminal Resistor

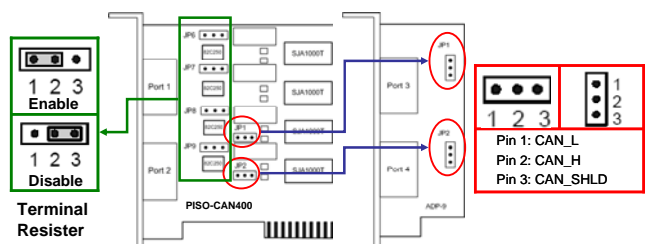

## Hardware Specifications


Model Name	PISO-CAN200-D	PISO-CAN200-T
<b>Bus Interface</b>		
Type	PCI bus, 5 V, 33 MHz, 32-bit, plug and play	
<b>CAN Interface</b>		
Controller	NXP SJA1000T with 16 MHz clock	
Transceiver	NXP 82C250	
Channel number	2	
Connector	9-pin male D-Sub	5-pin screwed terminal block
Baud Rate (bps)	10 k, 20 k, 50 k, 125 k, 250 k, 500 k, 800 k, 1 M (allow user-defined baud rate)	
Terminator Resistor	Jumper for 120 Ω terminator resistor	
<b>Power</b>		
Power Consumption	250 mA @ 5 V	
<b>Mechanism</b>		
Dimensions	126mm x 22mm x 85mm (W x L x H)	
<b>Environment</b>		
Operating Temp.	0 ~ 60 °C	
Storage Temp.	-20 ~ 70 °C	
Humidity	5 ~ 85% RH, non-condensing	

## Utility

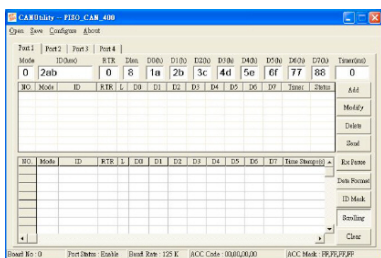

- Can be a CAN system monitor tool with PISO-CAN200/400 cards
- Can test PISO-CAN200/400 cards
- Send/Receive/Record CAN messages.
- Provide cyclic transmission function
- Record the CAN messages with filter ID with time stamp

## Flow Diagram for Applications

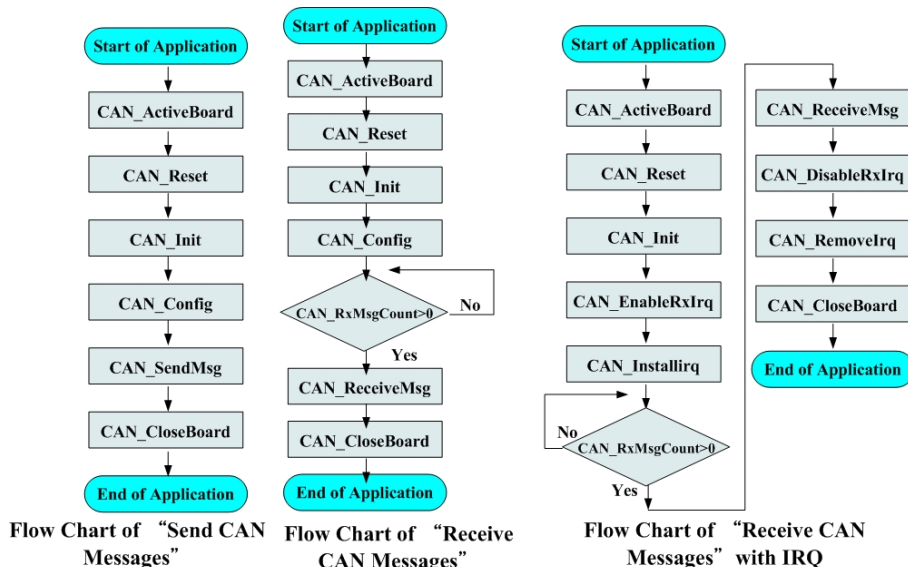

## Ordering Information

<b>PISO-CAN200-D</b>	2-Port Isolated Protection CAN Communication Board with 9-pin D-sub connector
<b>PISO-CAN200-T</b>	2-Port Isolated Protection CAN Communication Board with 5-pin Screw Terminal Connector