




PCI Express x1 CAN Communication Card



PEX-CAN200i-D

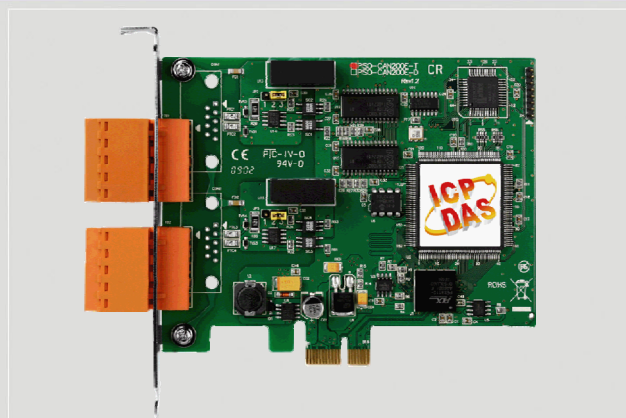


PEX-CAN200i-T

The PEX-CAN200i can represents an economic solution of an active CAN board with express PCI bus. It has 2 independent CAN bus communication ports with 5-pin screw terminal connector or 9-pin male D-sub connector, and has the ability to cover a wide range of CAN applications. Besides, PEX-CAN200i uses the new CAN controller Phillips SJA1000T and transceiver 82C250, which provide bus arbitration, error detection with auto correction and re-transmission function.


Features

- Compatible with CAN 2.0 parts A and B
- Fully compatible with ISO 11898-2 standard
- Support CAN baud from 10 kbps ~ 1 Mbps
- 2500 Vrms photo couple isolation on the CAN bus
- 33 MHz, 32 bit, X1 PCI Express bus
- Built-in jumper to select 120 Ω terminal resistor
- 3 kV galvanic isolation
- 2 independent CAN channels
- Direct memory mapping to the CAN controller
- Provide VB6.0, VC++6.0, Delphi, BCB6.0 demos
- LabView/DASYLab driver
- Driver support Windows 98/ME/NT/2K/XP


Software Layer

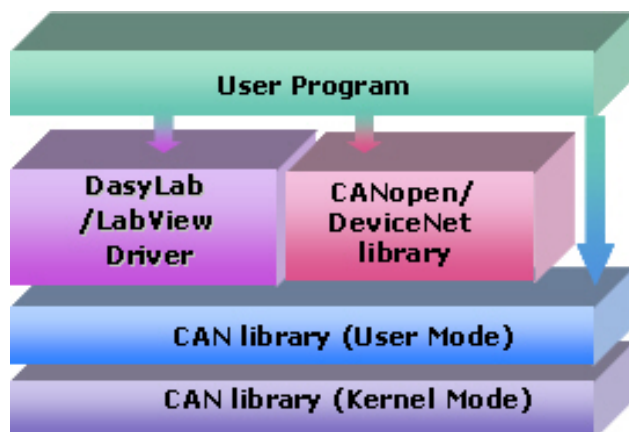


Hardware architecture

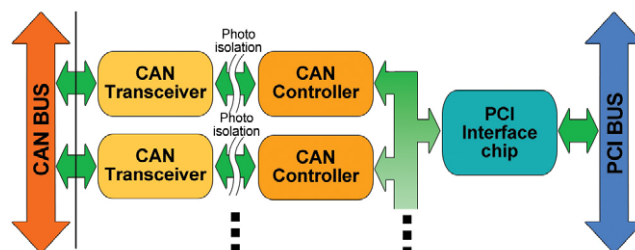

Pin Assignments




9-pin D-sub male connector



5-pin Screw terminal connector


Terminal Resistor

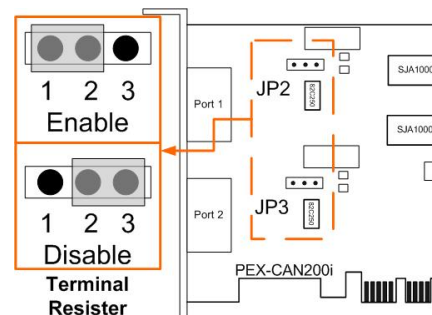

Hardware Specifications


Model Name	PEX-CAN200i-D		PEX-CAN200i-T
Bus Interface			
Type	33 MHz, 32 bit, X1 PCI Express bus		
CAN Interface			
Controller	NXP SJA1000T with 16 MHz clock		
Transceiver	NXP 82C250		
Channel number	2		
Connector	9-pin male D-Sub	5-pin screwed terminal block	
Baud Rate (bps)	10 k, 20 k, 50 k, 125 k, 250 k, 500 k, 800 k, 1 M (allow user-defined baud rate)		
Terminator Resistor	Jumper for 120 Ω terminator resistor		
Power			
Power Consumption	100 mA @ 12 V, 100 mA @ 3.3 V		
Mechanism			
Dimensions	120mm x 22mm x 85mm (W x L x H)		
Environment			
Operating Temp.	0 ~ 60 °C		
Storage Temp.	-20 ~ 70 °C		
Humidity	5 ~ 85% RH, non-condensing		

Utility

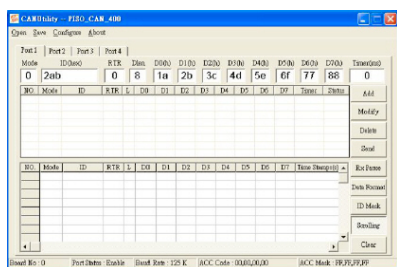

- Can be a CAN system monitor tool with CAN cards
- Can test CAN cards
- Send/Receive/Record CAN messages
- Provide cyclic transmission function
- Record the CAN messages with filter ID with time stamp

Flow Diagram for Applications

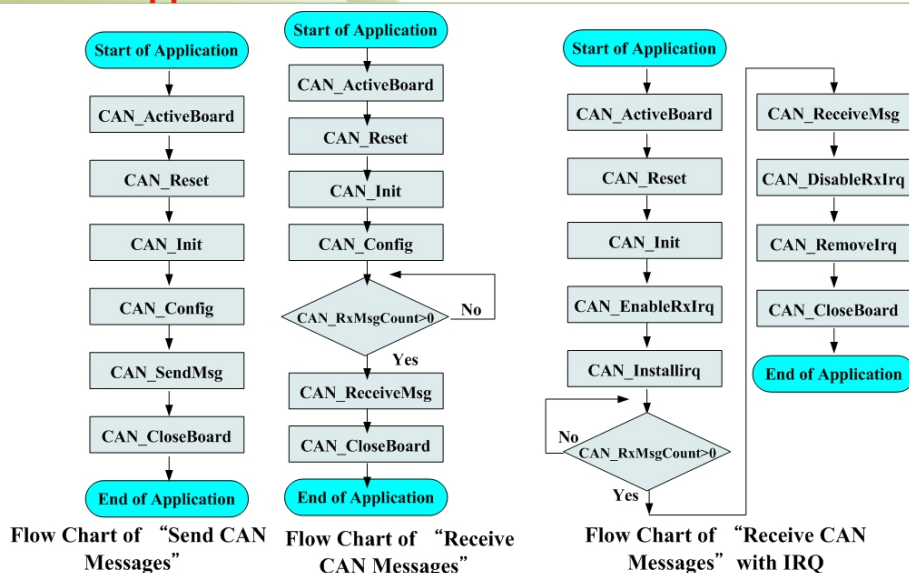

Ordering Information

PEX-CAN200i-D CR	2-Port Isolated Protection CAN Communication Board with 9-pin D-sub connector (RoHS)
PEX-CAN200i-T CR	2-Port Isolated Protection CAN Communication Board with 5-pin Screw Terminal Connector (RoHS)