

Getac

Rugged Mobile Computing Solutions



RX10

Fully Rugged Tablet


- Intel® Core™ M vPro™ Processor
- Premium Thin and Light design weighs 1.2kg and 18.8mm thin
- 10.1" Full HD LumiBond®2.0 display with Getac sunlight readable technology and capacitive touchscreen
- 2-in-1 design for mobility as a tablet or productivity with the optional attached keyboard
- Getac's proprietary optional SnapBack add-on featuring kickstand and hand strap, smart card reader or detachable keyboard



Office Dock



Snapback Add-on

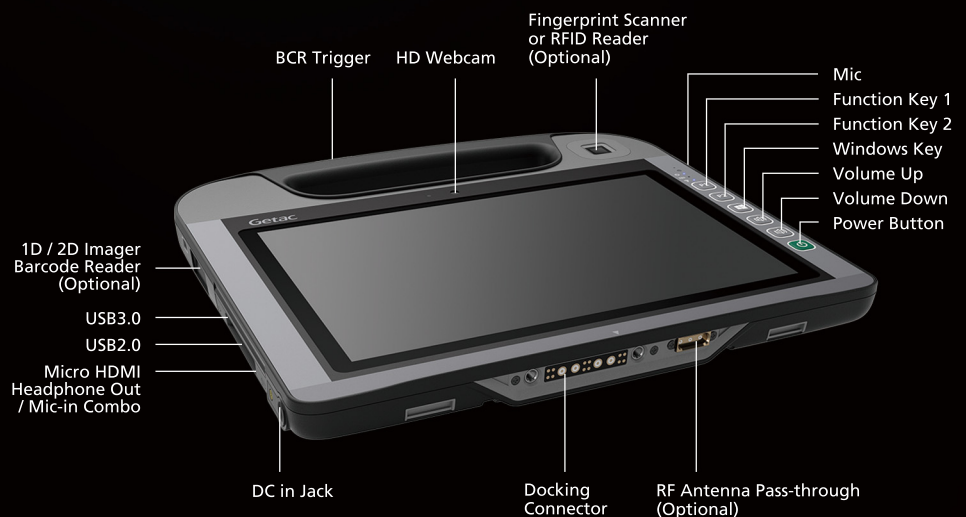

Rugged Mobile Computing Solutions

RX10 Fully Rugged Tablet

Getac recommends Windows.



Specifications

Operating System	Windows 10 Professional Windows 7 Professional	Software	Getac Utility Getac Camera Adobe® Reader® Getac Barcode Manager Optional CompuTrace® Persistence Technology
Mobile Computing Platform	Intel® Core™ M-5Y10c Processor 0.8 GHz Max. 2.0GHz with Intel® Turbo Boost Technology - 4MB Intel® Smart Cache Intel® Core™ M-5Y71 vPro™ Processor 1.2 GHz Max. 2.9GHz with Intel® Turbo Boost Technology - 4MB Intel® Smart Cache	Security Feature	TPM 2.0 Optional Intel® vPro™ Technology Optional fingerprint scanner or RFID reader ⁱⁱⁱ Optional SnapBack add-on : Hand Strap & Kick Stand & Smart Card Reader Optional SnapBack add-on : Hand Strap & Kick Stand & Smart Card Reader & Detachable Keyboard
VGA Controller	Intel® HD Graphics 5300	Power	AC adapter (65W, 100-240VAC, 50 / 60Hz) Li-Ion battery (15.2V, 2160mAh) ^v LifeSupport™ battery swappable technology
Display	10.1" TFT LCD FHD (1920 x 1200) 800 nits LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen	Dimension (W x D x H) & Weight	280 x 245 x 18.8 mm (11" x 9.65" x 0.74") 1.2kg (2.65 lbs) ^w
Storage & Memory	4GB LPDDR3 expandable to 8GB SSD 128GB / 256GB	Rugged Feature	MIL-STD-810G certified and IP65 certified 4 feet drop resistant Vibration & drop resistant e-Mark certified for vehicle usage Optional ANSI/ISA 12.12.01
Keyboard	6 tablet buttons (Windows, Power, Function Key 1, Function Key 2, Barcode Reader Trigger, Volume Up, Volume Down)	Environmental Specification	Temperature ^{iv} : - Operating: -21°C to 55°C / -5.8°F to 131°F - Storage: -40°C to 71°C / -40°F to 160°F Humidity: - 95% RH, non-condensing
Pointing Device	Touchscreen - Capacitive multi-touch screen - Optional dual mode touchscreen (multi-touch and digitizer)	Optional Accessories	Carry bag Main battery (15.2V, 2160mAh) AC adapter (65W, 100-240VAC) Vehicle adapter (90W, 11-16V DC and 22-32V DC) Capacitive stylus & tether Digitizer pen Shoulder strap (2-point) Hand-strap & Kick Stand Hand-Strap & Kick Stand & Smart Card Reader Hand-Strap & Kick Stand & Smart Card Reader & Detachable Keyboard Vehicle dock Office dock Protection Film Multi-Bay Charger (Two Bay) Multi-Bay Charger (Eight Bay)
Expansion Slot	Optional 1D/2D imager barcode reader		
I/O Interface	HD webcam x 1 8M pixels auto focus rear camera x 1 Headphone out / mic-in combo x 1 DC in Jack x 1 USB 3.0 (9-pin) x 1 USB 2.0 (4-pin) x 1 Docking connector (16-pin) x 1 Micro HDMI x 1 Optional RF antenna pass-through for GPS, WLAN and WWAN		
Communication Interface	Intel® Dual Band Wireless-AC 7265, 802.11ac Bluetooth (v4.0 class 1) ⁱ Optional dedicated GPS Optional Gobi™ mobile broadband		

Docking Solutions

	Serial Port	External VGA	DC in Jack	USB	LAN	HDMI	RF antenna connector
Vehicle Dock	1	-	1	2	1	-	3 (optional)
Office Dock	-	1	1	4	1	1	-

i Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
ii RFID and Fingerprint scanner are mutually exclusive options.
iii 13.56MHz Contactless RFID / NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).

iv Battery life testing conducted under MobileMark 2007. Battery performance will vary upon software applications, wireless settings, power management settings, LCD brightness, customized modules and environmental conditions. The battery has a limited number of charge cycles and may eventually need to be replaced by a Getac service provider. Battery life and charge cycles vary by use and settings.
v Weight varies from configurations and optional accessories.
vi Tested by a national independent third party test lab following MIL-STD-810G.

Getac Technology Corporation

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist.,
Taipei City, 11568, Taiwan, R.O.C.
Tel: +886 2 2785 7888
globalmarketing@getac.com
www.getac.com



Fieldworks Direct B.V.
Veemarktkade 8
NL-5222 AE Den Bosch
T +31 (0) 73 624 1111
E info@fieldworks.nl
I www.fieldworks.nl