

SP-C175

› 17" VESA Mount / Wall Mount Standalone Touch Monitor

NEW



Features



- IP65 (front) with Aluminum bezel
- Operating temperature -20°C~60°C
- Modularized I/O: VGA + DVI-D + HDMI
- Wall mount / VESA 100 mounting

Specifications

Model	SP-C175
Customer (2nd) Display	17" SXGA LCD (350 cd/m ²)
Display Resolution	1280 x 1024 (SXGA)
Dimensions (Panel)	396 x 329 x 54 mm (W x H x D)
Viewing Angle	Horizontal -80°~80°, Vertical -80°~70°
I/O Ports	VGA DVI-I cable (support DVI-D signal only) HDMI USB (touch connection)
Power Supply	Type: DC12V/3.3A/40W/φ2.5 power adapter AC Input: 90~264 Vac, 47-63 Hz

Environment

EMC & Safety	CE
Operating Temp.	-20°C~60°C (-4°F~140°F)
Storage Temp.	-30°C~70°C (-22°F~158°F)
Humidity	5%~95%

Application

- Automation
- Information
- Transportation
- Medical
- Banking
- Chemistry


Highlights



I/O Panel View



Dimensions

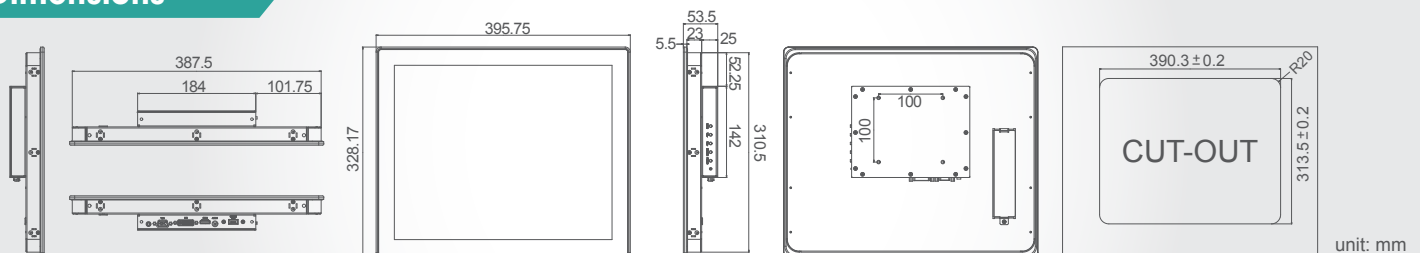

* All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information. For detail mechanics drawing, please contact our sales.