

Getac

Rugged Mobile Computing Solutions

T800

Fully Rugged Tablet




- 8.1" HD LumiBond® display for better viewing experience
- Getac proprietary SnapBack add-on featuring Smart card and contactless RFID reader Combo or 2nd expanded battery
- Choice of 1D/2D imager barcode reader, Serial port, MicroSD or Ethernet
- LifeSupport™ battery swappable technology for uninterrupted battery life
- MIL-STD-810G and IP65 certified



Office Dock



SnapBack Add-on

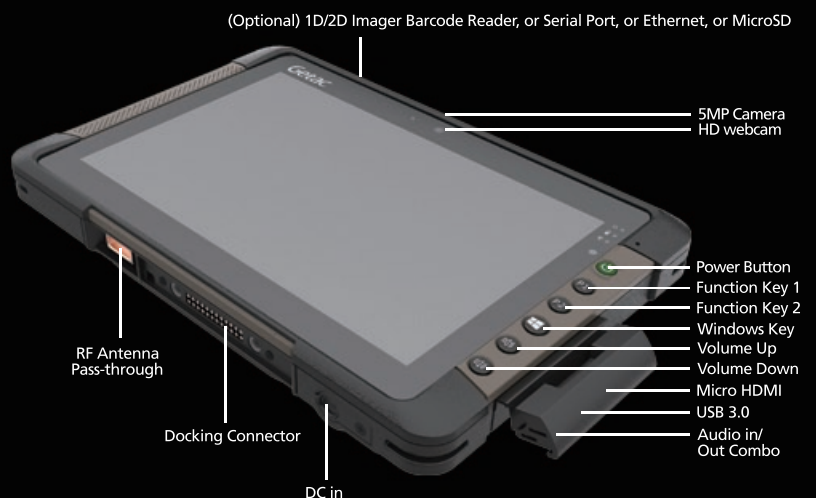

Rugged Mobile Computing Solutions

T800 Fully Rugged Tablet

Getac recommends Windows.



Specification

Operating System	Windows 8 Professional Windows 7 Professional	Communication Interface	Optional 10/100/1000 base-T Ethernet (occupies expansion slot) Intel® Dual Band Wireless-AC 7260, 802.11ac Bluetooth (v4.0 class 1) Optional dedicated GPS Optional Gobi™ mobile broadband
Mobile Computing Platform	Intel® Pentium® Processor N3530 2.16 GHz, burst up to 2.58 GHz - 2M Cache	Software	Getac Utility Getac Camera Getac V-GPS Adobe® Reader®
VGA Controller	Intel® HD Graphics	Security Features	Optional TPM 1.2 ⁱⁱⁱ Optional SnapBack add-on: Smart card and contactless RFID reader combo ^{iv}
Display	8.1" TFT LCD HD (1280 x 800) 600 nits LumiBond® display with Getac sunlight readable technology	Power	AC adapter (65W, 100-240VAC, 50 / 60Hz) Li-Ion battery (7.4V, 4200mAh) (up to 8 hours of battery life) ^v LifeSupport™ battery swappable technology (only with SnapBack 2nd expanded battery)
Storage & Memory	4GB DDR3L SSD 64GB / 128GB	Dimension (W x D x H) & Weight	227 x 151 x 24 mm (8.93" x 5.94" x 0.94") 0.88kg (1.94 lbs) ^{vi}
Keyboard	6 tablet buttons (Windows, Power, Function Key, Camera Capture/ Barcode Reader Trigger, Volume Up, Volume Down)	Rugged Features	MIL-STD-810G certified and IP65 certified 6 feet drop resistant Optional ANSI/ISA 12.12.01 Vibration & drop resistant e Mark certified for vehicle usage
Pointing Device	Touchscreen - Capacitive multi-touch screen - Optional dual mode touchscreen (multi-touch and digitizer)	Environmental Specifications	Temperature ^{vii} : - Operating: -21°C to 50°C / -5.8°F to 122°F - Storage: -40°C to 71°C / -40°F to 160°F Humidity: - 95% RH, non-condensing
Expansion Slots	Optional of 1D/2D imager barcode reader, Serial port, MicroSD or Ethernet ⁱ Optional SnapBack add-on: Smart card and contactless RFID reader combo ⁱⁱ Optional SnapBack add-on: 2nd expanded battery ⁱⁱ	Accessories	Carry bag Battery charger Main battery (7.4V, 4200mAh) 2nd expanded battery (14.4V, 2100 mAh) AC adapter (65W, 100-240VAC) Vehicle adapter (90W, 11-16V DC and 22-32V DC) Capacitive stylus & tether Digitizer pen Shoulder strap (2-point) Hand strap Wrist strap Protection film Vehicle cradle Vehicle dock Office dock
I/O Interface	HD webcam x 1 5M pixels auto focus rear camera x 1 USB 3.0 (9-pin) x 1 Headphone out/Mic-in Combo x 1 DC in Jack x 1 Micro HDMI x 1 Docking connector (24-pin) x 1 Optional RF antenna pass-through for GPS, WWAN and WLAN		

Docking solution

	External VGA	Microphone	Audio Output	DC in Jack	USB	LAN	HDMI	RF antenna connector (WWAN, WLAN, GPS)
Vehicle Dock	--	--	--	1	2	1	--	3
Office Dock	1	1	1	1	4	1	1	--

i Barcode reader, Serial port, Ethernet, and MicroSD port are mutually exclusive options.

ii All SnapBack add-ons are mutually exclusive options.

iii TPM option is not available with Micro SD and RS232 configurations.

iv 13.56MHz Contactless RFID and Smart Card reader (ISO 15693 and 14443 A/B compliant).

v Battery life testing conducted under MobileMark 2007. Battery performance will vary upon software applications, wireless settings, power management settings, LCD brightness, customized modules and environmental conditions.

The battery has a limited number of charge cycles and may eventually need to be replaced by a Getac service provider. Battery life and charge cycles vary by use and settings.

vi Weight varies from configurations and optional accessories.

vii Tested by a national independent third party test lab following MIL-STD-810G.


Getac



Getac Technology Corporation

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist.,
Taipei City, 11568, Taiwan, R.O.C.
Tel: +886 2 2785 7888
globalmarketing@getac.com
www.getac.com

Copyright © 2015 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.
All specifications are subject to change without notice. V06M05Y15WW



Fieldworks Direct B.V.
Veemarktkade 8
NL-5222 AE Den Bosch

T +31 (0) 73 624 1111
E info@fieldworks.nl
I www.fieldworks.nl