



## ZX70 Fully Rugged Tablet

- 7" LumiBond® Display Sunlight Readable Technology and Glove-enabled Capacitive Touchscreen
- 6 Feet Drop , MIL-STD-810G and IP67 Certified
- Optional Barcode Reader and RFID Reader
- Optional 4G LTE WWAN
- High Sensitivity GPS












Office Dock



**Vehicle Dock** 

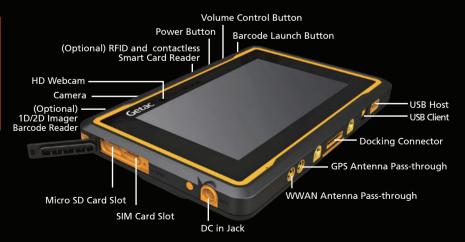





## **Specifications**

**Operating System** Android 6.0

Intel Atom® Processor x5-Z8350 1.44GHz, **Mobile Computing Platform** 

burst up to 1.92 GHz

- 2MB cache

Intel® HD Graphics VGA Controller

Display 7" IPS TFT LCD HD (1280 x 720)

LumiBond® display with Getac sunlight readable technology

Capacitive touchscreen with glove on

Storage & Memory 2GB LPDDR3 expandable to 4GB

eMMC 32GB / 64GB

Keyboard 4 tablet buttons ( Power, Barcode Launch Button,

Volume Up, Volume Down)

Pointing Device Touchscreen

- Capacitive multi-touch screen

**Expansion Slot** MicroSD x1

I/O Interface FHD webcam x 1

8M pixels auto focus rear camera x 1

MicroUSB 2.0 (Client) x 1 USB 2.0 (Host) x 1

Docking connector (Pogo/JAE)

DC in Jack x 1 MicroSD x 1

Optional RF antenna pass-through for GPS and WWAN

Wi-Fi 802.11 n Communication Interface

Bluetooth (v4.0)i Dedicated GPS

Optional 4G LTE mobile broadband

Software Getac Settings, Google Chrome, Gmail, Google+,

Google Maps, Google Play Music, Google Play Movies, Google Play Books, Google Play Newsstand,

Google Play Games, Google Drive, YouTube, Google Plus Photos, Hangouts

**Security Feature** Optional Contactless RFID/NFC combo readerii, iii

Optional Barcode reader Optional UHF RFID readeriv, v

AC adapter (24W, 100-240VAC, 50 / 60Hz) Power

Li-Ion battery (3.8V, 8400mAh)

Dimension (W x D x H) &

Weight

218 x 142 x 27 mm (8.58 " x 5.6" x 1.08")

780g (1.71lbs)vi

**Rugged Feature** MIL-STD-810G certified and IP67 certified

6 feet drop resistant Vibration & drop resistant e-Mark certified for vehicle usage

Temperaturevii: **Environmental Specification** 

- Operating: -21°C to 60°C / -6°F to 140°F

- Storage: -40°C to 71°C / -40°F to 160°F

Humidity:

- 95% RH , non-condensing

Accessories Carry bag

AC adapter (24W; 12V/2A, 100-240VAC; 50 / 60 Hz)

Vehicle adapter (60W, 11-16VDC and 22-32VDC)

Rotating Hand strap with Kick Stand and Stylus Holder

Office dock Vehicle dock

USB to RS232 converter cable

Docking connector to HDMI converter cable

Protection film Shoulder strap Wrist strap

## **Docking solutions**

	USB Host	USB Client	HDMI	Audio Output	Speaker	LAN	RS232	DC in Jack	RF Pass through
Getac Office dock (JAE connector)	2	1	1	1	N/A	1	N/A	1	N/A
Getac Office dock (Pogo pin)	2	N/A	N/A	1	N/A	1	N/A	1	N/A
Getac Vehicle dock (JAE connector)	2	N/A	1	1	1	1	1	1	2 (WWAN, GPS)
Getac Vehicle dock (Pogo pin)	2	N/A	N/A	1	1	1	1	1	2 (WWAN, GPS)

- Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices,
- users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area. 13.56MHz Contactless RFID/NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- RFID/NFC combo reader applies to US & EU only.
- UHF RFID reader is mutually excusive with Barcode reader
- EU only (865~868MHz, UHF RFID tags of EPC Class 1 Gen2 ISO18000-6C standards compliant).
- Weight and dimensions vary from configurations and optional access vii Tested by a national independent third party test lab following MIL-STD-810G.





## **Getac Technology Corporation**

5F, Building A, No. 209, Section 1, Nangang Rd., Nangang Dist., Taipei City, 11568, Taiwan, R.O.C. Tel: +886 2 2785 7888 globalmarketing@getac.com www.getac.com

Copyright © 2017 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request. V02M06Y17WW



NL-5222 AE 's-Hertogenbosch fax +31(0) 73 624 1112

www.fieldworks.nl