


eBOX746A-FL

Fanless Embedded System with VIA Processor up to 1.5 GHz

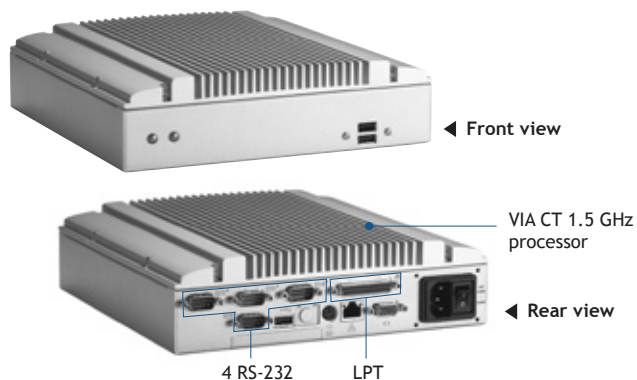

Features

- Fanless operation
- Onboard VIA Eden/ C7 processor up to 1.5 GHz
- VIA CX700M chipset
- High performance with extremely low power
- Full feature I/O
- Supports CompactFlash™
- One 2.5" IDE HDD drive bay
- 70 watt AC-in or DC-in power supply

Specifications

Standard Color	Silver
Construction	Aluminum extrusion and heavy-duty cold-rolled steel
CPU	VIA Eden 1 GHz/ VIA C7 1.5 GHz
System Memory	1 x 200-pin DDR2 SODIMM max. up to 1 GB
Chipset	VIA CX700M
BIOS	Phoenix-Award 4 Mbit with RPL/PXE LAN Boot ROM, SmartView and Customer CMOS backup
System I/O Outlet	3 x RS-232 (COM 2/3/4) 1 x RS-232/422/485 (COM 1) 1 x VGA 1 x LPT 1 x PS/2 keyboard/mouse 1 x 10/100Mbps Ethernet 3 x USB 2.0 1 x Vdc power input terminal block (DC version) 1 x Vac power input connector (AC version)
Watchdog Timer	255 levels, 0 - 255 sec.
Storage	Supports 1 x 2.5" IDE HDD drive bay Supports 1 x CompactFlash™
Expansion Interface	N/A
System Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Power Supply	* AC AT 72W Input: 85 - 270Vac Output: +5V @ 10A, +12V @ 1.5A, -12V @ 0.3A * DC AT 72W Input: 18 - 36Vdc Output: +5V @ 10A, +12V @ 1.5A, -12V @ 0.3A * DC AT 72W Input: 36 - 72Vdc Output: +5V @ 10A, +12V @ 1.5A, -12V @ 0.3A
Operating Temperature	-10°C - +55°C (23°F - 131°F) (with W.T. CF, Eden 1 GHz) -10°C - +50°C (23°F - 122°F) (with W.T. HDD, Eden 1 GHz)
Storage Temperature	-20°C - +80°C (-4°F - +176°F)
Humidity	10% - 90%, non-condensing
Vibration Endurance	2 Grms with CF (5 - 500 Hz, X, Y, Z directions) 0.5 Grms with HDD (5 - 500 Hz, X, Y, Z directions)
Dimensions	225 mm (8.86") (W) x 225 mm (8.86") (D) x 63 mm (2.48") (H)
Weight (net/gross)	2.65 kg (5.84 lb)/4.2 kg (9.26 lb)
Certification	CE
EOS Support	XPE, WinCE, Linux

* XPE: Windows® XP Embedded

Packing List


- 1 x quick manual
- 1 x driver CD
- 1 x Y cable for PS/2 keyboard/mouse
- 1 x screw pack
- 4 x HDD anti-vibration damper
- 2 x wall mount kit

Ordering Information

Standard	
eBOX746A-FL1.0G	Fanless embedded system with VIA Eden 1.0 GHz processor, 512 MB DDR2 SODIMM, AC-in 70W P/S
eBOX746A-FL1.5G	Fanless embedded system with VIA C7 1.5 GHz processor, 512 MB DDR2 SODIMM, AC-in 70W P/S
Optional	
2.5" IDE HDD	40 GB or above
DDR2 SODIMM	256 MB - 1 GB
Power supply	24Vdc-in, 48Vdc-in
CompactFlash™	256 MB - 8 GB
Power cord	
DIN rail kit	DRP-02

*Specifications and certifications are based on options and may vary.

Dimensions

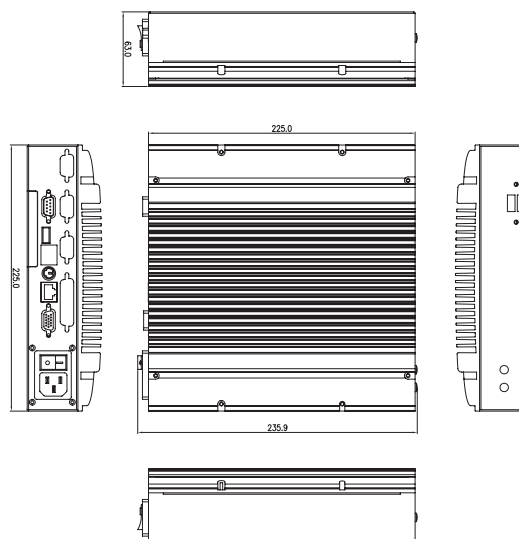

Embedded Systems

Embedded Field Controllers

Embedded MicroBoxes

Industrial Barebone Systems

Industrial Chassis

Industrial Workstations

Backplanes

Power Supplies

Peripherals & Accessories