



Overview

EasyLog model EL-USB series products are a line of low cost, compact, battery-operated data loggers with built-in memory and USB interface. Each product in the line offers a specific measurement function and range (see table below). Features shared by all EasyLog data loggers are:

- Programmable high and low alarm thresholds.
- All data is recorded to built-in, non-volatile memory. EasyLog data loggers do not lose readings when the battery is discharged or replaced.
- Automatic time and date stamping of logged data.
- Program the logger to begin recording immediately, or at a specific date and time.
- Bright, multi-color LEDs indicate status and alarm conditions during logging.
- Built-in USB interface for easy setup using any PC.
- Built-in, replaceable lithium battery (provided).
- Intrinsic isolation for voltage and current measurements.
- Removable cover protects the USB interface.
- Removable clip secures the instrument during transport or deployment.
- EasyLog application software for data logger setup, data download, and analysis.

EasyLog Products for Any Application

From temperature and humidity to carbon monoxide trending, there's an EasyLog data logger that's right for you.


Measurement		Model EL-USB													Page Number
Function	Range	-1	-1-RCG	-1-PRO	-2	-2+	-2-LCD	-2-LCD+	-3	-4	-5	-TC	-TC-LCD	-CO	
Temperature	-35 to +80°C (-31 to +176°F)	●													3
Temperature	-35 to +80°C (-31 to +176°F)		●												4
High Temperature	-40 to +125°C (-40 to +257°F)			●											5
Humidity, temperature, dew point	0 to 100% RH -35 to +80°C (-31 to +176°F)				●	●	●	●							6 7 8 9
Voltage	0 to 30 VDC								●						10
Process current	4 to 20 mA									●					11
Event, State, Count	3-28 VDC										●				12
Thermocouple (no display)	-130 to +900°C -200 to +1300°C -200 to +350°C											●			13
Thermocouple (with display)	-130 to +900°C -200 to +1300°C -200 to +350°C												●		14
Carbon monoxide	0 to 1000 ppm													●	15

Easy to Program and Deploy

Getting an EasyLogger product ready to acquire data is simple:

1. Remove the protective USB cover (image 1).
2. Plug the instrument into any convenient USB port.
3. Program the data logger with the provided EasyLog software (image 2):
 - Give the logger a unique name (convenient when deploying multiple units).
 - Select the required sample rate.
 - Select high and/or low alarm thresholds.
 - Select the specific date and time to begin logging.

Now remove the data logger from the USB port, replace the USB cover, and deploy the instrument wherever you need it.

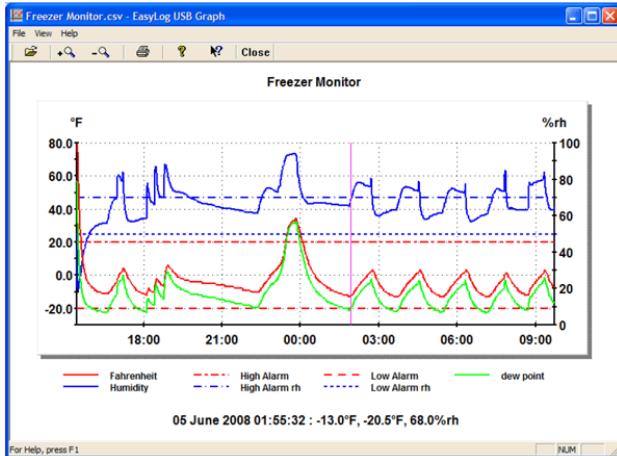

Time	Fahrenheit(°F)	High Alarm	Low Alarm	Humidity(%rh)	High Alarm rh	Low Alarm rh	dew point(°F)
1 4/6/2008 15:26	77	20	-20	50	70	50	56.9
2 4/6/2008 15:27	79	20	-20	25.5	70	50	40.7
3 4/6/2008 15:28	75	20	-20	20.5	70	50	31.9
4 4/6/2008 15:29	66	20	-20	19	70	50	22.6
5 4/6/2008 15:30	56	20	-20	20	70	50	15.6
6 4/6/2008 15:31	48	20	-20	22	70	50	11.1
7 4/6/2008 15:32	40	20	-20	24	70	50	6.2
8 4/6/2008 15:33	34	20	-20	25.5	70	50	2.4
9 4/6/2008 15:34	28	20	-20	27	70	50	-1.6
10 4/6/2008 15:35	24	20	-20	28.5	70	50	-3.9
11 4/6/2008 15:36	20	20	-20	30.5	70	50	-6
12 4/6/2008 15:37	16	20	-20	32.5	70	50	-8.2
13 4/6/2008 15:38	13	20	-20	34	70	50	-10
14 4/6/2008 15:39	11	20	-20	35	70	50	-11.2
15 4/6/2008 15:40	9	20	-20	37	70	50	-11.9
16 4/6/2008 15:41	7	20	-20	38.5	70	50	-12.9
17 4/6/2008 15:42	5	20	-20	39.5	70	50	-14.2
18 4/6/2008 15:43	4	20	-20	41	70	50	-14.4

Easy to Upload and Analyze Data

Whether you want to review stored data using the supplied application or using Microsoft Excel, getting meaningful results from recorded data is fast and easy:

1. Remove the protective USB cover.
2. Plug the instrument back into the PC's USB port.
3. Use EasyLog software to stop recording, access the instrument's stored data, and save it to a file that you name on the PC, all in one easy operation. The file format is Excel-compatible.
4. Immediately EasyLog's Graph utility is enabled to display all the stored data in one compressed view.
5. A cursor allows you to determine signal magnitude and time and date of acquisition for any value, and a magnifier utility allows you to zoom in for a closer look over any range – Easy and fast.
6. For more custom analysis and report generation, simply import the stored data file to Microsoft Excel for virtually unlimited flexibility in how you view and interpret your results.

EL-USB-1 Temperature Data Logger



Programmable Elements

- Logger Name
- °C, °F
- Logging Rate (10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Start Date and Start Time

Features

- -35 to +80°C (-31 to +176°F) Measurement Range
- USB Interface for Set-up and Data Download
- 2 User-Programmable Alarm Thresholds
- Bright Red, Green and Orange LED Indication
- Replaceable Internal Lithium Battery
- IP 67 Protection (totally protected against dust; protected against liquid immersion up to 1m)

Record Times

Sampling Interval	Record Times
1 sample every 10 seconds	45 hours
1 sample every minute	11 days
1 sample every 5 minutes	56 days
1 sample every 30 minutes	11 months
1 sample every hour	1.8 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Ordering Information

Description	Order Number
Temperature Data Logger Includes EL-USB-1 data logger, software on CD, and battery.	EL-USB-1
Battery Replacement battery.	BAT 3V6
Case Rugged metal alloy design for harsh conditions. Waterproof to IP-67/NEMA-4X	EL-USB-CASE

Specifications

Specification	Minimum	Typical	Maximum	Unit
Measurement Range	-35 (-31)		+80 (176)	°C (°F)
Internal Resolution		0.5 (1)		°C (°F)
Accuracy (overall error)		±1 (±2)		°C (°F)
Logging Rate	every 10s		every 12hr	-
Memory Capacity		16,382		samples
Operating Temperature Range	-35 (-31)		+80 (176)	°C (°F)
Battery Life	1*			Year

*@ 25 °C and 1m logging interval.



EL-USB-CASE

EL-USB-1-RCG Rechargeable Temperature Data Logger



Programmable Elements

- Logger Name
- °C, °F
- Logging Rate (1s, 10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Start Date and Start Time
- Data Rollover

Features

- -20 to +60°C (-4 to +140°F) Measurement Range
- Stainless Steel (316 grade) case
- Environmental protection to IP67
- Rechargeable lithium-ion battery
- Bi-color status LEDs behind protective glass window
- Mini-USB interface for set-up and data download
- User programmable alarm thresholds
- Immediate and delayed start logging
- Supplied with Windows control software and USB cable

Record Times

Sampling Interval	Record Times
1 sample every second	4.5 hours
1 sample every 10 seconds	45 hours
1 sample every minute	11 days
1 sample every 5 minutes	56 days
1 sample every 30 minutes	11 months
1 sample every hour	1.8 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Ordering Information

Description	Order Number
Temperature Data Logger Includes EL-USB-1-RCG data logger, software on CD, and battery.	EL-USB-1-RCG

Specifications

Specification	Minimum	Typical	Maximum	Unit
Measurement Range	-20 (-4)		+60 (+140)	°C (°F)
Internal Resolution		0.1 (0.2)		°C (°F)
Accuracy (overall error)		±1 (±2)		°C (°F)
Logging Rate	every 1s		every 12hr	-
Memory Capacity		16,382		Samples
Operating Temperature Range	-20 (-4)		+60 (+140)	°C (°F)
Recharging Time			5	Hours
Charging Temperature Range	0(+32)	+20(+68)	+45 (+113)	°C (°F)
Battery Life	1*		4**	Weeks

* @ -20°C (-4°F), 1 second logging rate; ** @ 20°C (68°F), 1 minutes logging rate

EL-USB-1-PRO High Temperature Data Logger



Programmable Elements

- Logger Name
- °C, °F
- Logging Rate (1s, 10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Start Date and Start Time
- Data rollover (FIFO circular recording)

Features

- -40 to +125°C (-40 to +257°F) Measurement Range
- Stainless Steel case
- USB Interface for Set-up and Data Download
- User-Programmable Alarm Thresholds
- Immediate and delayed logging
- Replaceable high capacity internal Lithium Battery
- IP 67 Protection (totally protected against dust; protected against liquid immersion up to 1m)

Record Times

Sampling Interval	Record Times
1 sample every second	9 hours
1 sample every 10 seconds	90 hours
1 sample every minute	22 days
1 sample every 5 minutes	112 days
1 sample every 30 minutes	22 months
1 sample every hour	> 2 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Ordering Information

Description	Order Number
Temperature Data Logger Includes EL-USB-1-PRO data logger, software on CD, and battery.	EL-USB-1-PRO
Battery Replacement battery.	BAT 3V6 PRO

Specifications

Specification	Minimum	Typical	Maximum	Unit
Measurement Range	-40 (-40)		+125 (257)	°C (°F)
Internal Resolution		0.1 (0.2)		°C (°F)
Accuracy (overall error)		±0.2 (±0.4)		°C (°F)
Logging Rate	every 1s		every 12hr	-
Memory Capacity		32,510		samples
Operating Temperature Range	-40 (-40)		+125 (257)	°C (°F)
Battery Life		1*		Year

*@ -20°C and 1s logging interval.

EL-USB-2 Humidity, Temperature and Dew Point Data Logger



Programmable Elements

- Logger Name
- °C, °F
- Logging Rate (10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms for humidity and temperature
- Start Date and Start Time

Record Times

Sampling Interval	Record Times
1 sample every 10 seconds	45 hours
1 sample every minute	11 days
1 sample every 5 minutes	56 days
1 sample every 30 minutes	11 months
1 sample every hour	1.8 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Features

- 0 to +100%RH Measurement Range
- -35 to +80°C (-31 to +176°F) Measurement Range
- Dew point automatically calculated from RH and temperature
- USB Interface for Set-up and Data Download
- User-Programmable Alarm Thresholds for %RH & T
- Status Indication via Red and Green LEDs
- Supplied with Replaceable Internal Lithium Battery

Ordering Information

Description	Order Number
RH, Temp, and Dew Point Data Logger Includes EL-USB-2 data logger, software on CD, and battery.	EL-USB-2
Battery Replacement battery.	BAT 3V6

Specifications

	Specification	Minimum	Typical	Maximum	Unit
Relative Humidity	Measurement Range	0		100	%RH
	Humidity Repeatability (short term)		±0.1		%RH
	Accuracy (overall error, 20-80% RH)		±3.0*		%RH
	Internal Resolution		0.5		%RH
	Long-term Stability		0.5		%RH/Yr
Temperature	Measurement Range	-35 (-31)		±80 (±176)	°C (°F)
	Repeatability		±0.1 (±0.2)		°C (°F)
	Accuracy (overall error)		±0.5 (±1)	±2 (±4)	°C (°F)
	Internal Resolution		0.5 (1)		°C (°F)
Dew Point	Accuracy (overall error) (25°C, 40-100%RH)		±1.1 (±2)**		°C (°F)
Logging Rate		every 10s		every 12hr	-
Memory Capacity			16,382		samples
Operating Temperature Range		-35 (-31)		+80 (176)	°C (°F)
Battery Life			1***		Year

* This specifies the overall error in the logged readings, for relative humidity measurements between 20 and 80%RH.

** This specifies the overall error in the calculated dew point, for relative humidity measurements between 40 and 100%RH at 25°C.

*** Depending on sample rate, ambient temperature and use of alarm LEDs

EL-USB-2+ Humidity, Temperature and Dew Point Data Logger



Programmable Elements

- Logger Name
- °C, °F
- Logging Rate (10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms for humidity and temperature
- Start Date and Start Time
- Data rollover (FIFO circular recording)

Record Times

Sampling Interval	Record Times
1 sample every 10 seconds	45 hours
1 sample every minute	11 days
1 sample every 5 minutes	56 days
1 sample every 30 minutes	11 months
1 sample every hour	1.8 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Specifications

	Specification	Minimum	Typical	Maximum	Unit
Relative Humidity	Measurement Range	0		100	%RH
	Humidity Repeatability (short term)		±0.1		%RH
	Accuracy (overall error, 20-80% RH)		±2.0*	±4.0	%RH
	Internal Resolution		0.5		%RH
	Long-term Stability		0.5		%RH/Yr
Temperature	Measurement Range	-35 (-31)		+80 (+176)	°C (°F)
	Repeatability		±0.1 (±0.2)		°C (°F)
	Accuracy (overall error)		±0.3 (±0.6)	±1.5 (±3)	°C (°F)
	Internal Resolution		0.5 (1)		°C (°F)
Dew Point	Accuracy (overall error) (25°C, 40-100%RH)		±1.1 (±2)**		°C (°F)
Logging Rate		every 10s		every 12hr	-
Memory Capacity			16,382		samples
Operating Temperature Range		-35 (-31)		+80 (176)	°C (°F)
Battery Life			1***		Year

* This specifies the overall error in the logged readings, for relative humidity measurements between 20 and 80%RH.

** This specifies the overall error in the calculated dew point, for relative humidity measurements between 40 and 100%RH at 25°C.

*** Depending on sample rate, ambient temperature and use of alarm LEDs


Features

- More accurate than the EL-USB-2
- 0 to +100%RH Measurement Range
- -35 to +80°C (-31 to +176°F) Measurement Range
- Dew point automatically calculated from RH and temperature
- USB Interface for Set-up and Data Download
- User-Programmable Alarm Thresholds for %RH & T
- Status Indication via Red and Green LEDs
- Supplied with Replaceable Internal Lithium Battery

Ordering Information

Description	Order Number
Higher Accuracy RH, Temp, and Dew Point Data Logger Includes EL-USB-2+ data logger, software on CD, and battery.	EL-USB-2+
Battery Replacement battery.	BAT 3V6

EL-USB-2-LCD Humidity, Temperature and Dew Point Data Logger

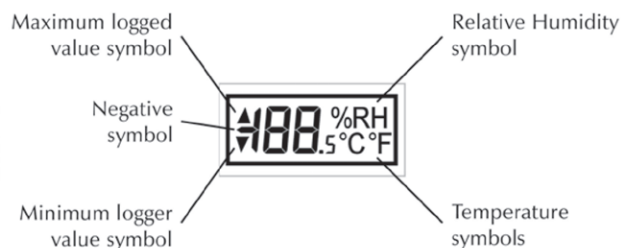

Programmable Elements

- Logger Name
- °C, °F
- Logging Rate (10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Immediate, delayed and push-to-start logging
- Display off, on for 30 seconds after button press, or permanently on
- Data rollover (Allows unlimited logging periods by overwriting the oldest data when the memory is full)

Record Times

Sampling Interval	Record Times
1 sample every 10 seconds	45 hours
1 sample every minute	11 days
1 sample every 5 minutes	56 days
1 sample every 30 minutes	11 months
1 sample every hour	1.8 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Specifications

	Specification	Minimum	Typical	Maximum	Unit
Relative Humidity	Measurement Range	0		100	%RH
	Humidity Repeatability (short term)		±0.1		%RH
	Accuracy (overall error, 20-80% RH)		±3.0	±6.0	%RH
	Internal Resolution		0.5		%RH
	Long-term Stability		0.5		%RH/Yr
Temperature	Measurement Range	-35 (-31)		+80 (+176)	°C (°F)
	Repeatability		±0.1 (0.2)		°C (°F)
	Accuracy (overall error)		±0.5 (1)	±2 (±4)	°C (°F)
	Internal Resolution		0.5 (1)		°C (°F)
Dew Point	Accuracy (overall error) (25°C, 40-100%RH)		±1.1 (+2)		°C (°F)
Logging Rate		every 10s		every 12hr	-
Memory Capacity			16,382		samples
Operating Temperature Range *		-35 (-31)		+80 (176)	°C (°F)
Battery Life			1**		Year

* At temperatures below -20°C (-4°F) the LCD will exhibit slower response times of approximately 10 seconds.

** Depending on sample rate, ambient temperature and use of alarm LEDs


Features

- 0 to +100%RH Measurement Range
- -35 to +80°C (-31 to +176°F) Measurement Range
- Dew point indication via Windows control software
- USB Interface for Set-up and Data Download
- User-Programmable Alarm Thresholds for %RH & T
- High contrast LCD, with two and a half digit temperature and humidity display function
- Immediate, delayed and push-to-start logging
- Status Indication via Red and Green LEDs
- Supplied with Replaceable Internal Lithium Battery

Ordering Information

Description	Order Number
RH, Temp, and Dew Point Data Logger Includes EL-USB-2-LCD data logger, software on CD, and battery.	EL-USB-2-LCD
Battery Replacement battery.	BAT 3V6

EL-USB-2-LCD+ Humidity, Temperature and Dew Point Data Logger

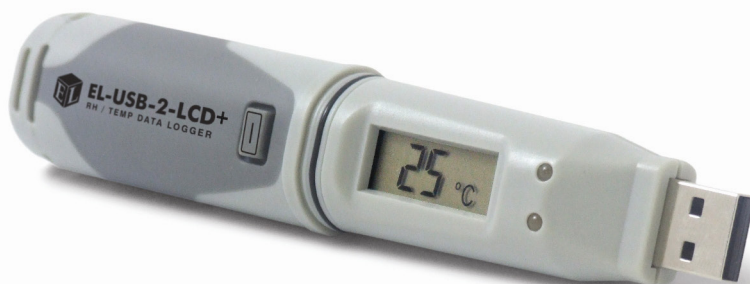

Programmable Elements

- Logger Name
- °C, °F
- Logging Rate (10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Immediate, delayed and push-to-start logging
- Display off, on for 30 seconds after button press, or permanently on
- Data rollover (Allows unlimited logging periods by overwriting the oldest data when the memory is full)

Record Times

Sampling Interval	Record Times
1 sample every 10 seconds	45 hours
1 sample every minute	11 days
1 sample every 5 minutes	56 days
1 sample every 30 minutes	11 months
1 sample every hour	1.8 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Specifications

	Specification	Minimum	Typical	Maximum	Unit
Relative Humidity	Measurement Range	0		100	%RH
	Humidity Repeatability (short term)		±0.1		%RH
	Accuracy (overall error, 20-80% RH)		±2.0*	±4.0	%RH
	Internal Resolution		0.5		%RH
	Long-term Stability		0.5		%RH/Yr
Temperature	Measurement Range	-35 (-31)		+80 (+176)	°C (°F)
	Repeatability		±0.1 (±0.2)		°C (°F)
	Accuracy (overall error)		±0.3 (±0.6)	±1.5 (±3)	°C (°F)
	Internal Resolution		0.5 (1)		°C (°F)
Dew Point	Accuracy (overall error) (25°C, 40-100%RH)		±1.1 (±2)**		°C (°F)
Logging Rate		every 10s		every 12hr	-
Memory Capacity			16,379		samples
Operating Temperature Range		-35 (-31)		+80 (176)	°C (°F)
Battery Life			1***		Year

* This specifies the overall error in the logged readings, for relative humidity measurements between 20 and 80%RH.

** This specifies the overall error in the calculated dew point, for relative humidity measurements between 40 and 100%RH at 25°C.

*** Depending on sample rate, ambient temperature and use of alarm LEDs

Features

- More accurate than the EL-USB-2-LCD
- 0 to +100%RH Measurement Range
- -35 to +80°C (-31 to +176°F) Measurement Range
- Dew point indication via Windows control software
- USB Interface for Set-up and Data Download
- User-Programmable Alarm Thresholds for %RH & T
- High contrast LCD, with two and a half digit temperature and humidity display function
- Immediate, delayed and push-to-start logging
- Status Indication via Red and Green LEDs
- Supplied with Replaceable Internal Lithium Battery

Ordering Information

Description	Order Number
Higher Accuracy RH, Temp, and Dew Point Data Logger with LCD Display Includes EL-USB-2-LCD+ data logger, software on CD, and battery.	EL-USB-2-LCD+
Battery Replacement battery.	BAT 3V6

EL-USB-3 Voltage Data Logger



Programmable Elements

- Logger Name
- Logging Rate (1s, 10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Start Date and Start Time

Features

- 0-30V d.c. Measurement Range
- Logging Rates between 1s and 12hr
- Stores 32,510 readings
- Connection via two screw terminals
- USB Interface for Set-up and Data Download
- User-Programmable Alarm Thresholds
- Red and Green LED Status Indication
- Replaceable Internal Lithium Battery

Record Times

Sampling Interval	Record Times
1 sample every second	9 hours
1 sample every 10 seconds	90 hours
1 sample every minute	22 days
1 sample every 5 minutes	112 days
1 sample every 30 minutes	22 months
1 sample every hour	> 2 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Ordering Information

Description	Order Number
Voltage Data Logger Includes EL-USB-3 data logger, measurement leads, software on CD, and battery.	EL-USB-3
Battery Replacement battery.	BAT 3V6

Specifications

Specification	Minimum	Typical	Maximum	Unit
Measurement Range	0		30	VDC
Internal Resolution		50		mV
Accuracy (overall error)		±1		%
Input Impedance		60		KΩ
Logging Rate	every 1s		every 12hr	-
Memory Size		32,510		Samples
Operating Temperature Range	-25 (-13)		+80 (176)	°C (°F)
Battery Life	1*			Year

*Depending on ambient temperature, logging rate, and use of alarm LED.

EL-USB-4 Current Loop Data Logger



Programmable Elements

- Logger Name
- Logging Rate (1s, 10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Start Date and Start Time

Features

- 4-20mA Current Loop Measurement Range
- Logging Rates between 1s and 12hr
- Stores 32,000 readings
- Connection via two screw terminals
- USB Interface for Set-up and Data Download
- User-Programmable Alarm Thresholds
- Red and Green LED Status Indication
- Replaceable Internal Lithium Battery

Record Times

Sampling Interval	Record Times
1 sample every second	9 hours
1 sample every 10 seconds	90 hours
1 sample every minute	22 days
1 sample every 5 minutes	112 days
1 sample every 30 minutes	22 months
1 sample every hour	> 2 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Ordering Information

Description	Order Number
Current Loop Data Logger Includes EL-USB-4 data logger, measurement leads, software on CD, and battery.	EL-USB-4
Battery Replacement battery.	BAT 3V6

Specifications

Specification	Minimum	Typical	Maximum	Unit
Measurement Range	4		20	mA
Shunt Resistance		110		Ohm
Internal Resolution		0.05		mA
Accuracy (overall error)		±1		% ±1count
Logging Rate	every 1s		every 12hr	-
Memory Size			32,000	samples
Operating Temperature Range	-35 (-31)		+80 (176)	°C (°F)
1/2AA 3.6V Lithium Battery Life	1*			Year

*Depending on ambient temperature, logging rate, and use of alarm LED.

EL-USB-5 Event, State, and Count Data Logger



Features

- Functions as an event, state, and counter logger
- Logging rate of up to five times per second for events, two times per second for state changes and 100 times per second when counting
- Stores up to 32,510 readings in event mode
- Stores up to 32,510 readings in state change mode
- Accepts input voltages of up to 24V
- Volt free contacts option (normally open contact only)
- Rising and falling edge triggering
- LED flash on event / state change
- Connection via two screw terminals
- USB Interface for Set-up and Data Download
- Replaceable Internal Lithium Battery

Programmable Elements

- Logger Name
- Logging Rate (1s, 10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Start Date and Start Time

Record Times

Sampling Interval	Record Times
1 sample every second	9 hours
1 sample every 10 seconds	90 hours
1 sample every minute	22 days
1 sample every 5 minutes	112 days
1 sample every 30 minutes	22 months
1 sample every hour	> 2 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Ordering Information

Description	Order Number
Event, State, Count Data Logger Includes EL-USB-5 data logger, measurement leads, software on CD, and battery.	EL-USB-RCG
Battery Replacement battery.	BAT 3V6

Specifications

Specification	Minimum	Typical	Maximum	Unit
Time between events	200			Milliseconds
Time between state changes	500			Milliseconds
Time between event counts	10			Milliseconds
Input voltage	3		28	V DC
'Volt free contacts' voltage	2.75		3.6	V
'Volt free contacts' current		35		μ A
Timing accuracy			± 3	seconds per 24 hours
Operating temperature range			+80 (176)	$^{\circ}$ C ($^{\circ}$ F)
1/2AA 3.6V Lithium Battery Life	1*			Year

*Depending on ambient temperature, logging rate, and use of alarm LED.

EL-USB-TC Thermocouple Data Logger



Programmable Elements

- Logger Name
- °C, °F
- Logging Rate (1s, 10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Start Date and Start Time
- Range of Logging Modes available

Record Times

Sampling Interval	Record Times
1 sample every second	9 hours
1 sample every 10 seconds	90 hours
1 sample every minute	22 days
1 sample every 5 minutes	112 days
1 sample every 30 minutes	22 months
1 sample every hour	> 2 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Specifications

Specification	Minimum	Typical	Maximum	Unit
Measurement range (K-type)	-200 (-328)		+1300 (2372)	°C (°F)
Measurement range (J-type)	-130 (-202)		+900 (1652)	°C (°F)
Measurement range (T-type)	-200 (-328)		+350 (662)	°C (°F)
Resolution (internal and displayed)		0.5 (1)		°C (°F)
Accuracy (logger error)		± 1 (2)**		°C (°F)
Logging Rate	every 1s		every 12hr	-
Memory Capacity		32,000		samples
Operating Temperature Range*	-10 (14)		+40 (104)	°C (°F)
Battery Life***		6		Month

* Using thermocouple sensors, the EL-USB-TC can log temperatures as detailed above, but the data logger should not be subjected to temperatures outside the Operating temperature range.

** EL-USB-TC is designed to be used when disconnected from USB port.

*** @ 25°C and 1m logging rate


Features

- -200 to +1300°C Measurement Range (K-type)
- -130 to +900°C Measurement Range (J-type)
- -200 to +350°C Measurement Range (T-type)
- USB Interface for Set-up and Data Download
- 2 User-Programmable Alarm Thresholds
- Bright Red and Green LED Indication
- Replaceable Internal Lithium Battery
- Supplied with basic K-type thermocouple rated from 0 to 110°C (32 to 230°F)

Ordering Information

Description	Order Number
Thermocouple Data Logger Includes EL-USB-TC data logger, 1.5m K-type Thermocouple, software on CD, and battery.	EL-USB-TC
Battery Replacement battery.	BAT 3V6

EL-USB-TC-LCD Thermocouple Data Logger with LCD Display

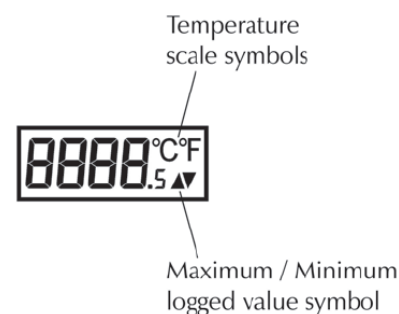

Programmable Elements

- Logger Name
- °C, °F
- Logging Rate (1s, 10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Immediate, delayed and push-to-start logging
- Display off, on for 30 seconds after button press, or permanently on
- Data rollover (Allows unlimited logging periods by overwriting the oldest data when the memory is full)

Record Times

Sampling Interval	Record Times
1 sample every second	9 hours
1 sample every 10 seconds	90 hours
1 sample every minute	22 days
1 sample every 5 minutes	112 days
1 sample every 30 minutes	22 months
1 sample every hour	> 2 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

Specifications

Specification	Minimum	Typical	Maximum	Unit
Measurement range (K-type)	-200 (-328)		+1300 (2372)	°C (°F)
Measurement range (J-type)	-100 (-148)		+900 (1652)	°C (°F)
Measurement range (T-type)	-200 (-328)		+400 (752)	°C (°F)
Resolution (internal and displayed)		0.5 (1)		°C (°F)
Accuracy (logger error)		± 1 (2)**		°C (°F)
Logging Rate	every 1s		every 12hr	-
Memory Capacity		32,000		samples
Operating Temperature Range*	-10 (14)		+40 (104)	°C (°F)
Battery Life***		6		Month

* Operating temperature applies to the data logger module only.

** Quoted accuracy is for the data logger only and excludes the thermocouple probe.

*** @ 25°C and 1m logging rate and display off

Features

- -200 to +1300°C Measurement Range (K-type)
- -100 to +900°C Measurement Range (J-type)
- -200 to +400°C Measurement Range (T-type)
- High contrast LCD, with four digit temperature display
- USB Interface for Set-up and Data Download
- 2 User-Programmable Alarm Thresholds
- Bright Red and Green LED Indication
- Immediate, delayed and push-to-start logging
- Replaceable Internal Lithium Battery
- Supplied with basic K-type thermocouple rated from 0 to 300°C (32 to 446°F)

Ordering Information

Description	Order Number
Thermocouple Data Logger with LCD Display Includes EL-USB-TC-LCD data logger, 1.5m K-type Thermocouple, software on CD, and battery.	EL-USB-TC-LCD
Battery Replacement battery.	BAT 3V6

EL-USB-CO Carbon Monoxide Data Logger



PLEASE NOTE: The EL-USB-CO is a professional measuring instrument, designed to record Carbon Monoxide (CO) gas levels for later analysis. It is not an alarm/safety/warning device and should not be used in this capacity.

Programmable Elements

- Logger Name
- Logging Rate (10s, 30s, 1m, 5m)
- Warning Threshold
- Start Date and Start Time

Features

- 0 to 1000 ppm CO measurement range
- Stores up to 32,510 Measurements
- User-Programmable Warning Threshold with Bright Visual and Audible Warning
- USB Interface for Set-up and Data Download
- Expected sensor life: 4 years
- Replaceable Internal Lithium Battery

Record Times

Sampling Interval	Record Times
1 sample every 10 seconds	3.5 days
1 sample every 30 seconds	11 days
1 sample every minute	22 days
1 sample every 5 minutes	3.5 months

Ordering Information


Description	Order Number
Carbon Monoxide Data Logger Includes EL-USB-CO data logger, software on CD, and battery.	EL-USB-CO
Battery Replacement battery.	BAT 3V6

Specifications

Specification	Minimum	Typical	Maximum	Unit
Measurement Range	0		1000	ppm CO
Internal Resolution		0.5		ppm CO
Accuracy (error)		±6		% of reading
Repeatability		±2		% of reading
Decay of reading over time			5	% of reading/year
Expected sensor life		4		years
Response time (to reach 90%)		1		minute
Logging Rate	every 10s		every 5min	-
Memory Capacity			32,510	samples
Operating Temperature Range (15-90%RH, non-condensing)	-10 (14)		+40 (104)	°C (°F)
Operating pressure range	900		1100	mbar
Battery Life			3	month

* with battery supplied, 10 minute logging rate, 25°C ambient temperature, audible warning disabled, reading <10 ppm CO

Dimensions

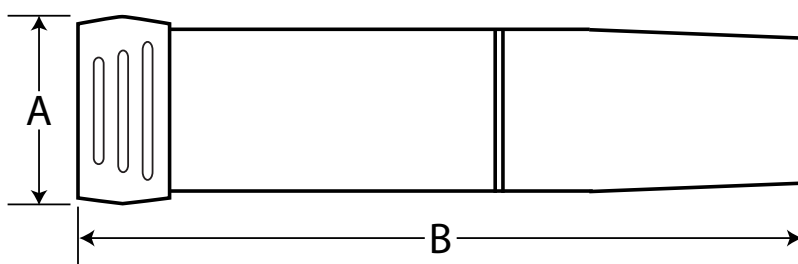

Model Number	Dimension in inches (mm)	
	A	B
EL-USB-1	1.02 (25.9)	3.86 (98.0)
EL-USB-1-RCG	0.78 (19.8)	3.65 (92.7)
EL-USB-1-PRO	0.69 (17.5)	4.33 (110.0)
EL-USB-2	1.04 (26.4)	4.06 (103.0)
EL-USB-2+	1.04 (26.4)	4.06 (103.0)
EL-USB-2-LCD	1.00 (25.3)	4.96 (126.0)
EL-USB-2-LCD+	1.00 (25.3)	4.96 (126.0)
EL-USB-3	1.06 (26.9)	4.41 (112.0)
EL-USB-4	1.06 (26.9)	4.43 (112.5)
EL-USB-5	1.06 (26.9)	4.43 (112.5)
EL-USB-TC	1.06 (26.9)	4.65 (118.1)
EL-USB-TC-LCD	0.9 (23.9)	5.3 (134.5)
EL-USB-CO	1.03 (26.2)	4.93 (125.2)



DATAQ Instruments, Inc.
 241 Springside Drive
 Akron, Ohio 44333
 Phone: 330-668-1444
 Fax: 330-666-5434

Data Acquisition Product Links

(click on text to jump to page)

[Data Acquisition](#) | [Data Logger](#) | [Chart Recorder](#) | [Thermocouple](#) | [Oscilloscope](#)