



The EL-USB-1-LCD temperature data logger measures and stores up to 16,378 temperature readings over a -35 to +80°C (-31 to +176°F) range. Easily set up the logging rate and start-time, and download the stored data by plugging the data logger into a PC's USB port and running the purpose-designed software that allows you to easily graph, print and export data to other applications. The high contrast LCD can show a variety of temperature information. At the touch of a button, the user can cycle between the current, maximum and minimum stored temperatures. The EL-USB-1-LCD data logger is supplied with a long-life lithium battery which can typically allow logging for more than 1 year. Function and alarm states are indicated by flashing red and green LEDs. The data logger is protected against moisture to IP67 standard when the protective cap is fitted.

Features

- -35 to +80°C (-31 to +176°F) Measurement Range
- USB Interface for Set-up and Data Download
- 2 User-Programmable Alarm Thresholds
- Bright Red and Green LED Indication
- Replaceable Internal Lithium Battery
- IP 67 Protection (totally protected against dust; protected against liquid immersion up to 1m) when cap is fitted.

Programmable Elements


- Logger Name
- °C, °F
- Logging Rate (10s, 1m, 5m, 30m, 1hr, 6hr, 12hr)
- High and Low Alarms
- Immediate, delayed, and push-to-start logging
- Display off, on for 30 seconds after button press, or permanently on
- Data rollover (Allows unlimited logging periods by overwriting the oldest data when the memory is full)
- Start Date and Start Time

Record Times

Sampling Interval	Record Times
1 sample every 10 seconds	45 hours
1 sample every minute	11 days
1 sample every 5 minutes	56 days
1 sample every 30 minutes	11 months
1 sample every hour	1.8 years
1 sample every 6 hours	> 2 years
1 sample every 12 hours	> 2 years

LCD Display

The EL-USB-1-LCD features a high contrast LCD that shows logged temperature values using seven segment numbers, along with annunciators. The LCD can also show information regarding the logging status.

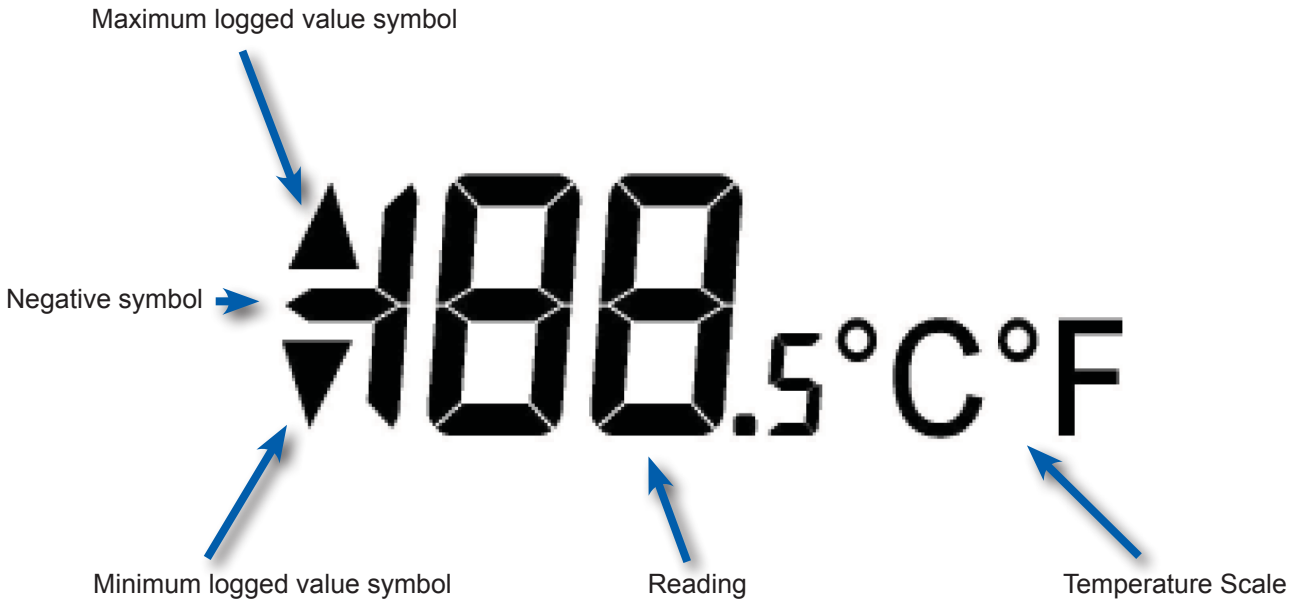

The LCD shows three different recorded readings, which can be cycled through using the built-in push button. The most recent logged value, maximum logged value and minimum logged value can be displayed for temperature. In addition, logging and alarm status is shown using two high intensity LEDs (next page).

Display	Logger Status	Explanation
	Delayed Start	This is shown when the logger is set to start at a specific data and time. If the logger is set to "LCD off" or "LCD on for 30 seconds" mode, then this will only be shown after the button is pressed. Otherwise the display will remain blank.
	Push to Start	This is shown when the logger is setup for "Push to start" logging.
	Logging	This is shown when the logger is running in "LCD off" mode, and the button is pressed. The display clears again after three seconds.
	Stopped	If the logger has not been set to log and the button is pressed, three dashes are displayed for three seconds.





LED Flashing Modes

The EL-USB-1-LCD features 2 single color LEDs; one LED flashes green to indicate alarm level status. The other LED flashes red to indicate a problem condition.


The red LED will flash when the logged temperature has exceeded a Low or High alarm level. By default hold is disabled. In this mode the red LED will no longer continue to flash after the logged temperature has returned to normal from an alarm condition.

Hold can be turned on via the control software. In this mode the red LED that indicates an alarm condition will continue to flash, even after the logged temperature has returned to normal. The red LED will effectively have latched into its alarm condition. This feature ensures that the user is notified that an alarm level has been exceeded, without the need to download the data from the logger.



		Green Single Flash (10 seconds) The data logger is currently logging. No alarm.
		Green Single Flash (20 seconds) The data logger is currently logging. No alarm. However, the battery is low and should be replaced before logging important data.
		Green Single Flash (30 seconds) The data logger is not currently logging, but is primed to start at a later date and time (delayed start).
		Green Double Flash (20 seconds) The data logger is full and has stopped logging. No alarm.
		Red Single Flash (10 seconds) The data logger is currently logging. Low alarm.
		Red Single Flash (20 seconds) The data logger is currently logging. Low alarm. However, the battery is low and should be replaced before logging important data.
		Red Double Flash (10 seconds) The data logger is currently logging. High alarm.
		Red Double Flash (20 seconds) The data logger is currently logging. High alarm. However, the battery is low and should be replaced before logging important data.
		Red/Green single flash (20 seconds) The data logger is full and has stopped logging. Alarm (high, low or both).
		No LEDs Flash The data logger is stopped, the battery is dead, or there is no battery.

Dimensions

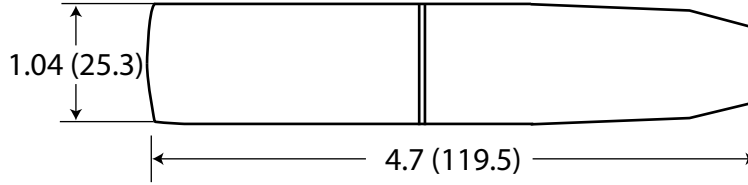

Dimensions shown are inches (mm)

Specifications

Specification	Minimum	Typical	Maximum	Unit
Measurement Range	-35 (-31)		+80 (176)	°C (°F)
Internal Resolution		0.1 (0.2)		°C (°F)
Accuracy (overall error)		±0.5 (±1)	±1.5 (±3)	°C (°F)
Logging Rate	every 10s		every 12hr	-
Memory Capacity		16,378		samples
Operating Temperature Range	-35 (-31)		+80 (176)	°C (°F)
Battery Life	1*			Year

*@ 25 °C and 1m logging interval.

EL-USB-1-LCD Ordering Information



Description	Order Number
Temperature Data Logger Includes EL-USB-1-LCD data logger, software on CD, and battery.	EL-USB-1-LCD
Battery Replacement battery.	BAT 3V6

Easy to Program and Deploy

Getting an EasyLogger product ready to acquire data is simple:

1. Remove the protective USB cover.
2. Plug the instrument into any convenient USB port (image 1).
3. Program the data logger with the provided EasyLog software (image 2):
 - Give the logger a unique name (convenient when deploying multiple units).
 - Select the required sample rate.
 - Select high and/or low alarm thresholds.
 - Select the specific date and time to begin logging.

Now remove the data logger from the USB port, replace the USB cover, and deploy the instrument wherever you need it.

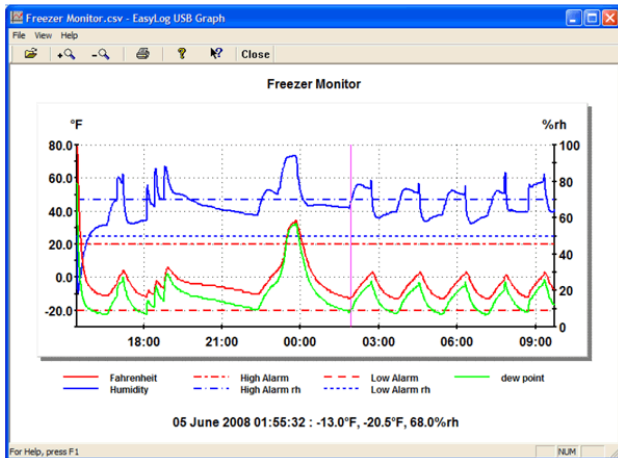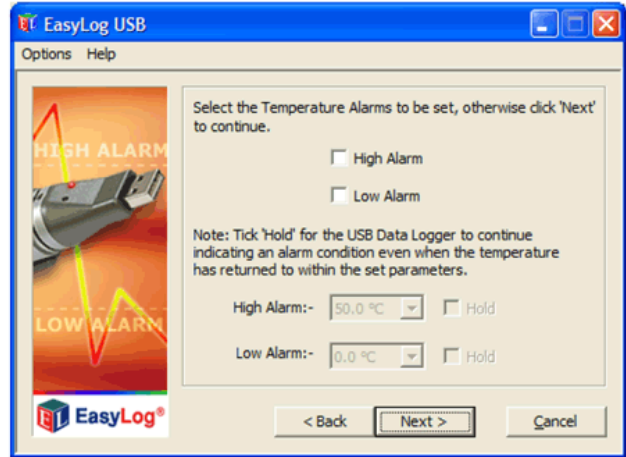

	A	B	C	D	E	F	G	H	I
	Freezer Monitor	Time	Fahrenheit(F)	High Alarm	Low Alarm	Humidity(%rh)	High Alarm rh	Low Alarm rh	dew point(F)
1	1	4/6/2008 15:26	77	20	-20	50	70	50	56.9
2	2	4/6/2008 15:27	79	20	-20	25.5	70	50	40.7
3	3	4/6/2008 15:28	75	20	-20	20.5	70	50	31.9
4	4	4/6/2008 15:29	66	20	-20	19	70	50	22.6
5	5	4/6/2008 15:30	56	20	-20	20	70	50	15.6
6	6	4/6/2008 15:31	48	20	-20	22	70	50	11.1
7	7	4/6/2008 15:32	40	20	-20	24	70	50	6.2
8	8	4/6/2008 15:33	34	20	-20	25.5	70	50	2.4
9	9	4/6/2008 15:34	28	20	-20	27	70	50	-1.6
10	10	4/6/2008 15:35	24	20	-20	28.5	70	50	-3.9
11	11	4/6/2008 15:36	20	20	-20	30.5	70	50	-6
12	12	4/6/2008 15:37	16	20	-20	32.5	70	50	-8.2
13	13	4/6/2008 15:38	13	20	-20	34	70	50	-10
14	14	4/6/2008 15:39	11	20	-20	35	70	50	-11.2
15	15	4/6/2008 15:40	9	20	-20	37	70	50	-11.9
16	16	4/6/2008 15:41	7	20	-20	38.5	70	50	-12.9
17	17	4/6/2008 15:42	5	20	-20	39.5	70	50	-14.2
18	18	4/6/2008 15:43	4	20	-20	41	70	50	-14.4
19	19	4/6/2008 15:43	4	20	-20	41	70	50	-14.4

Easy to Upload and Analyze Data

Whether you want to review stored data using the supplied application or using Microsoft Excel, getting meaningful results from recorded data is fast and easy:

1. Remove the protective USB cover.
2. Plug the instrument back into the PC's USB port.
3. Use EasyLog software to stop recording, access the instrument's stored data, and save it to a file that you name on the PC, all in one easy operation. The file format is Excel-compatible.
4. Immediately EasyLog's Graph utility is enabled to display all the stored data in one compressed view.
5. A cursor allows you to determine signal magnitude and time and date of acquisition for any value, and a magnifier utility allows you to zoom in for a closer look over any range – Easy and fast.
6. For more custom analysis and report generation, simply import the stored data file to Microsoft Excel for virtually unlimited flexibility in how you view and interpret your results.

2.8 inch Full color touch-screen display

Easy-to-use menu to Set Up data loggers; Download data from logger; View Data; and Instrument settings (Time/Date, Power, Status)



On/Off button

ON = Single press

OFF = Press and hold for 3 seconds

The EL-DataPad allows users of certain EL-USB data loggers to configure their units, upload data, and view logging results on-the-spot rather than moving the logger to their PC. This allows shorter breaks in data collection for more data continuity, less travel time, and on-the-spot data review and data logger reconfiguration.

The logger is connected to the EL-DataPad via a standard USB port at the top of the viewer. Once connected, you are guided through a simple touchscreen menu with options to Set-Up Logger, Stop Logger & Download and View Data. On-screen instructions follow the same structure as EL-USB-WIN software for the PC currently provided with each data logger.

Data from up to 100 loggers can be viewed on the EL-DataPad, with data from a further 400 units stored on the unit at any one time. Data can be transferred to a PC using a micro USB cable supplied with the unit. Once uploaded, data is saved in comma separated variable (csv) format, making it suitable for import into spreadsheet programs such as Microsoft Excel or graphed on a PC using EL-WIN-USB software.

Features

- Archive capacity for up to 500 logger uploads
- View uploaded data with general trend and summary reports
- Allows full or quick set-up of compatible EL-USB data loggers
- Touch screen interface for navigation of menus
- 2.8 inch full color TFT display
- Stored data can be transferred to a PC via micro USB cable
- Rechargeable internal built-in lithium battery provides up to 8 hours of use between charges

Compatible EL-USB Data Loggers

The EL-DataPad is compatible with the following Data Loggers:

- EL-USB-1
- EL-USB-1-LCD
- EL-USB-1-PRO
- EL-USB-2
- EL-USB-2+
- EL-USB-2-LCD
- EL-USB-2-LCD+
- EL-USB-TC
- EL-USB-TC-LCD

EL-USB Data Logger Series Overview

EasyLog Products for Any Application

From temperature and humidity to carbon monoxide trending, there's an EasyLog data logger that's right for you. Click on "Jump" to go to the product's web page.

Measurement		Model EL-USB													
Function	Range	-1	-1-LCD	-1-RGG	-1-PRO	-2	-2+	-2-LCD	-2-LCD+	-3	-4	-5	-TC	-TC-LCD	-CO
Temperature	-35 to +80°C (-31 to +176°F)	Jump	Jump												
Temperature	-20 to +60°C (-4 to +140°F)			Jump											
High Temperature	-40 to +125°C (-40 to +257°F)				Jump										
Humidity, temperature, dew point	0 to 100% RH -35 to +80°C (-31 to +176°F)					Jump	Jump	Jump	Jump						
Voltage	0 to 30 VDC									Jump					
Process current	4 to 20 mA										Jump				
Event, State, Count	3-28 VDC											Jump			
Thermocouple (no display)	-130 to +900°C (J) -200 to +1300°C (K) -200 to +350°C (T)												Jump		
Thermocouple (with display)	-130 to +900°C (J) -200 to +1300°C (K) -200 to +350°C (T)													Jump	
Carbon monoxide	0 to 1000 ppm														Jump



DATAQ Instruments, Inc.
 241 Springside Drive
 Akron, Ohio 44333
 Phone: 330-668-1444
 Fax: 330-666-5434

Data Acquisition Product Links

(click on text to jump to page)

[Data Acquisition](#) | [Data Logger](#) | [Chart Recorder](#)