

ICP DAS ETHERNET I/O MODULES

Various Digital I/O Function

Modbus TCP/UDP Protocol

32-bit Counter Function

Pair-connection Function

Low Power consumption

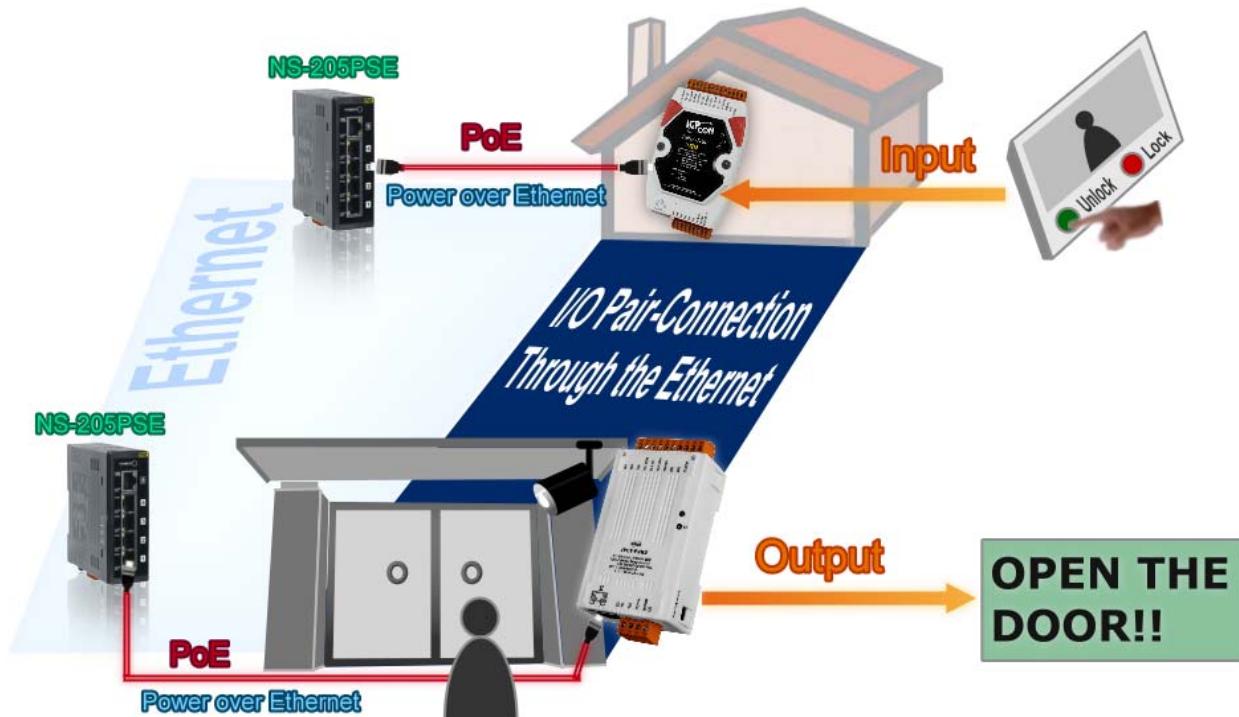
Easy Web configuration

Cost-effective



● Introduction

Providing networking ability and various digital I/O functions, the PETL-7000 and tET/tPET series are IP-based Ethernet I/O monitoring and control modules. The module can be remotely controlled through a 10/100 M Ethernet network by using Modbus TCP/UDP protocol. Modbus has become a de facto standard communications protocol in industry, and is now the most commonly available means of connecting industrial electronic devices. This makes the PETL-7000/tET/tPET series perfect integration with the HMI, SCADA, PLC and other software systems.




The functionality of the PETL-7000/tET/tPET series modules is almost the same as the PETL-7000 series. The PETL-7000/tET/tPET series Ethernet I/O modules support various I/O types, like photo-isolated digital input, relay contact, PhotoMOS relay, and open-collector output. The module can be used to create DI to DO pair-connect through the Ethernet. Once the configuration is completed, the modules can poll the status of the local DI channels and then use the Modbus/TCP protocol to continuously write to a remote DO device in the background. It's useful when connecting digital I/O devices that do not themselves have Ethernet capability.

Comparison Item	tPET	PETL-7000	PETL-7000
CPU	32-bit ARM		80186
Ethernet		10/100 M, PoE	
Modbus TCP/UDP		Yes	
Web Configuration		Yes	
Web HMI	Simplified		Yes
Multi-client		Yes	
IP Filter		Yes	
Latched DI		Yes	
DI as Counter	32-bit, 3.5 kHz		32-bit, 500 Hz
I/O Pair-Connection	Yes (Poll/Push Mode)		Yes (Poll Mode)
PWM	Yes		-
Dual Watchdog	Yes (CPU, host)		Yes (Module, host)
ESD Protection		+/- 4 KV	
Surge Protection	-		+/- 0.5 KV
Form Factor	Tiny Size		Palm Size
Remarks	Cost-effective		-
Note: tET = tPET without PoE.			

DHCP minimizes configuration errors caused by manual IP address configuration, such as address conflicts caused by the assignment of an IP address to more than one computer or device at the same time. The PETL-7000/tET/tPET series module supports the DHCP client function, which allows to PETL-7000/tET/tPET easily obtain the necessary TCP/IP configuration information from a DHCP server. The module also contains a UDP responder that transmits its IP address information a UDP search from the eSearch utility program, making local management more efficient.

The series of Ethernet I/O modules features a powerful 32-bit MCU to enable efficient handling of network traffic. It also has a built-in web server that provides an intuitive web management interface to allow users to modify the settings of the module including DHCP/Static IP, gateway/mask and serial ports.

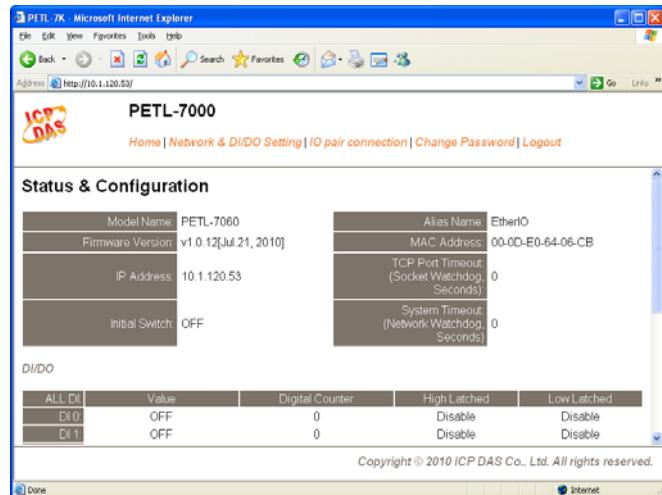The module provides dual watchdog: CPU watchdog (hardware function) and host watchdog (software function). The CPU watchdog which automatically resets the CPU if the built-in firmware is operating abnormally, while the host watchdog set the digital output with predefined safe-value when there is no communication between the module and the host (PC or PLC) for a period of time (watchdog timeout). The dual watchdog is an important feature that ensures the module operates continuously, even in harsh environments.



Low Power Consumption

The PETL-7000/tPET series module offers true IEEE 802.3af-compliant (classification, Class 1) Power over Ethernet (PoE) using a standard category 5 Ethernet cable to receive power from a PoE switch such as the NS-205PSE. If there is no PoE switch on site, the module will also accept power input from a DC adapter. The PETL-7000/tET/tPET series is designed for ultra-low power consumption, reducing hidden costs from increasing fuel and electricity prices, especially when you have a huge amount of device servers installed. Reducing the amount of electricity consumed by choosing energy-efficient equipment can have a positive impact on maintaining a green environment.

The module is equipped with removable terminal block connectors to allow easy wiring. For maximum space savings, the tET/tPET series is offered in an amazing tiny form-factor while the PETL-7000 series is palm-size form-factor; this makes them can be easily installed in anywhere, even directly embedded into a machine.

● Applications

- Remote Maintenance
- Remote diagnosis
- Testing Equipment
- Building, Factory and Machine Automation

Ethernet I/O Module



● Selection Guide



PETL-7000 Selection Guide

Digital I/O							
Model	Ethernet	DI			DO		
		Channel	Type	Sink/Source	Channel	Type	Sink/Source
PETL-7042	10/100 M, PoE	-	-	-	16	Open Collector	Sink
PETL-7044	10/100 M, PoE	8	Wet	Sink, Source	8	Open Collector	Sink
PETL-7050	10/100 M, PoE	12	Wet	Sink, Source	6	Open Collector	Sink
PETL-7051	10/100 M, PoE	16	Wet	Sink, Source	-	-	-
PETL-7052	10/100 M, PoE	8	Wet	Sink, Source	8	Open Collector	Source
PETL-7053	10/100 M, PoE	16	Dry	Source	-	-	-

Relay Output/Digital Input							
Model	Ethernet	DI			Relay Output		
		Channel	Type	Sink/Source	Channel	Relay	Type
PETL-7060	10/100 M, PoE	6	Wet	Sink, Source	6	Power Relay	Form A (SPST N.O.)
PETL-7065	10/100 M, PoE	6	Wet	Sink, Source	6	PhotoMOS Relay	Form A (SPST N.O.)
PETL-7066	10/100 M, PoE	-	-	-	8	PhotoMOS Relay	Form A (SPST N.O.)
PETL-7067	10/100 M, PoE	-	-	-	8	Power Relay	Form A (SPST N.O.)



PETL-7000 Series
Ethernet module with PoE and Digital I/O

Features
Cost-effective Ethernet I/O modules (Modbus TCP/UDP slave)
Contains a 32-bit MCU that efficiently handles network traffic
10/100 Base-TX Ethernet, RJ-45 x1 (Auto-negotiating, Auto MDI/MDIX, LED Indicator)
Includes redundant power inputs: PoE and DC input
Supports TCP, UDP, HTTP, DHCP, BOOTP and TFTP protocols
Supports UDP responder for device discovery
Supports web configuration and firmware update via Ethernet
Various digital input and output types
Supports latched DI and 32-bit high-speed counter functions
Supports I/O pair-connection through the Ethernet
Dual-watchdog with power-on and safe value
Easy DIN-Rail mounting
RoHS compliant with no Halogen
Made from fire retardant materials (UL94-V0 Level)
Low power consumption (about 1.7 W only)



Modul	PETL-7042/7044/7050/7051/7052/7053/7060/7065/7066/7067
System	
CPU	32-bit MCU
Dual Watchdog	Yes
Communication	
Ethernet Port	10/100 Base-TX, 8-Pin RJ-45 x1, (Auto-negotiating, Auto-MDI/MDIX, LED indicator) PoE (IEEE 802.3af, Class 1)
LED Display	
PoE	PoE indicator
L1	Run indicator
L2	Link/Act indicator
L3	10/100 M indicator
Mechanical	
Dimensions	123 mm x 72 mm x 35 mm
Installation	DIN-Rail or Wall mounting
Environment	
Operating Temperature	-25 °C ~ +75 °C
Storage Temperature	-30 °C ~ +80 °C
Humidity	10 ~ 90 % RH, non-condensing
Power Requirements	
Power Input	PoE: IEEE 802.3af, Class 1 Terminal block: +12 ~ 48 V _{DC} (non-regulated)
Power Consumption	0.05 A @ 48 V _{DC} Max. for PETL-7060

I/O Specifications

Digital Input/Output Series

Models			
	PETL-7042	PETL-7044	PETL-7050

Digital Input			
Input Channels	-	8	12
Input Type (Device)	-	Wet Contact (Sink, Source)	
On Voltage Level	-	+10 V _{DC} ~ +50 V _{DC}	
Off Voltage Level	-	+4 V _{DC} max.	
Input Impedance	-	10 k Ohm	
Counters	-	Max. Count: 4,294,967,285 (32 bits)	
	-	Max. Input Frequency: 3.5 kHz (without filter)	
	-	Min. Pulse Width: 0.15 ms	
Oversupply Protection	-	+70 V _{DC}	
Isolation	-	3750 Vrms	
Digital Output			
Output Channels	16	8	6
Output Type (Module)	Sink, Open Collector		
Output Voltage	+5 V _{DC} ~ +30 V _{DC}	+10 V _{DC} ~ +40 V _{DC}	+5 V _{DC} ~ +30 V _{DC}
Max. Load Current	100 mA/channel at 25 °C	300 mA/channel at 25 °C	100 mA/channel at 25 °C
Short Circuit Protection	Yes		
Output Isolation	3750 Vrms		

Models			
	PETL-7051	PETL-7052	PETL-7053

Digital Input			
Input Channels	16	8	16
Input Type (Device)	Wet Contact (Sink, Source)		Dry Contact
On Voltage Level	+10 V _{DC} ~ +50 V _{DC}		Open
Off Voltage Level	+4 V _{DC} max.		Close to GND
Input Impedance	10 k Ohm		
Counters	Max. Count: 4,294,967,285 (32 bits)		
	Max. Input Frequency: 3.5 kHz (without filter)		
	Min. Pulse Width: 0.15 ms		
Oversupply Protection	+70 V _{DC}		-
Effective Distance	-		500 m max.
Isolation	3750 Vrms		
Digital Output			
Output Channels	-	8	-
Output Type (Module)	-	Source, Open Collector	-
Output Voltage	-	+10 V _{DC} ~ +40 V _{DC}	-
Max. Load Current	-	650 mA/channel at 25 °C	-
Oversupply Protection	-	+48 V _{DC}	-
Output Isolation	-	3750 Vrms	-


Digital Input/Relay Output Series

Models		
Digital Input		
Input Channels	6	-
Input Type (Device)	Wet Contact (Sink, Source)	-
On Voltage Level	+10 V _{DC} ~ +50 V _{DC}	-
Off Voltage Level	+4 V _{DC} max.	-
Input Impedance	10 k Ohm	-
Counters	Max. Count: 4,294,967,285 (32 bits) Max. Input Frequency: 3.5 kHz (without filter) Min. Pulse Width: 0.15 ms	-
Oversupply Protection	+70 V _{DC}	-
Isolation	3750 Vrms	-
Relay Output		
Output Channels	6	8
Output Type (Module)	Power Relay, Form A (SPST N.O.)	
Output Voltage Range	250 V _{AC} /30 V _{DC}	
Max. Load Current	5.0 A/channel at 25 °C	
Operating Time	6 ms	
Release Time	4 ms	
Electrical Life (Resistive load)	VED	5 A 250 V _{AC} 30,000 ops (10 ops/minute) at 75 °C 5 A 30 V _{DC} 70,000 ops (10 ops/minute) at 75 °C
	UL	5 A 250 V _{AC} /30 V _{DC} 6,000 ops 3 A 250 V _{AC} /30 V _{DC} 100,000 ops
Mechanical Life	20,000,000 ops. At no load (300 ops./ minute)	
Relay Output Isolation	3000 Vrms	

Models		
Digital Input		
Input Channels	6	-
Input Type (Device)	Wet Contact (Sink, Source)	-
On Voltage Level	+10 V _{DC} ~ +50 V _{DC}	-
Off Voltage Level	+4 V _{DC} max.	-
Input Impedance	10 k Ohm	-
Counters	Max. Count: 4,294,967,285 (32 bits) Max. Input Frequency: 3.5 kHz (without filter) Min. Pulse Width: 0.15 ms	-
Oversupply Protection	+70 V _{DC}	-
Isolation	3750 Vrms	-
Relay Output		
Output Channels	6	8
Output Type (Module)	PhotoMOS Relay, Form A	
Load Voltage	60 V _{DC} / V _{AC}	
Load Current	60 V/1.0 A (Operating Temperature -25°C ~ -40°C) 60 V/0.8 A (Operating Temperature +40°C ~ +60°C) 60 V/0.7 A (Operating Temperature +60°C ~ +75°C)	
Turn ON Time	1.3 ms (Typical)	
Turn Off Time	0.1 ms (Typical)	
Relay Output Isolation	3000 Vrms	

Pin Assignments

Digital Input/Output Series



PETL-7042

PETL-7042

23	DO11
22	DO10
21	DO9
20	DO8
19	DO7
18	DO6
17	DO5
16	DO4
15	DO3
14	DO2
13	DO1
12	DO0
11	DO.GND1
10	DO.PWR1

PETL-7044

23	DI2
22	DI1
21	DI0
20	DI.COM1
19	DO7
18	DO6
17	DO5
16	DO4
15	DO3
14	DO2
13	DO1
12	DO0
11	DO.GND
10	DO.PWR

PETL-7044

PETL-7050

23	DI5
22	DI4
21	DI3
20	DU2
19	DI1
18	DI0
17	DO5
16	DO4
15	DO3
14	DO2
13	DO1
12	DO0
11	DO.GND
10	DO.PWR

PETL-7050

23	DI15
22	DI14
21	DI13
20	DI10
19	DI8
18	DI7
17	DI6
16	DI5
15	DI4
14	DI3
13	DI2
12	DI1
11	DI0
10	DO.GND

PETL-7051

PETL-7051

23	DI12
22	DI11
21	DI10
20	DI9
19	DI8
18	DI.COM1
17	DI7
16	DI6
15	DI5
14	DI4
13	DI3
12	DI2
11	DI1
10	DI0

PETL-7052

23	DI2
22	DI1
21	DI0
20	DI.COM1
19	DO7
18	DO6
17	DO5
16	DO4
15	DO3
14	DO2
13	DO1
12	DO0
11	DO.GND
10	DO.PWR

PETL-7052


PETL-7053

23	DI12
22	DI11
21	DI10
20	DI9
19	DI8
18	DI7
17	DI6
16	DI5
15	DI4
14	DI3
13	DI2
12	DI1
11	DI0

PETL-7053

23	DI12
22	DI11
21	DI10
20	DI9
19	DI8
18	DI7
17	DI6
16	DI5
15	DI4
14	DI3
13	DI2
12	DI1
11	DI0

Digital Input/Relay Output Series



**PETL-7060
PETL-7065**

**PETL-7060
PETL-7065**


23	RL5 COM
22	RL5 NO
21	RL4 COM
20	RL4 NO
19	RL3 COM
18	RL3 NO
17	RL2 COM
16	RL2 NO
15	RL1 COM
14	RL1 NO
13	RLO COM
12	RLO NO
11	N/A
10	N/A

**PETL-7066
PETL-7067**

23	RL5 COM
22	RL5 NO
21	RL4 COM
20	RL4 NO
19	RL3 COM
18	RL3 NO
17	RL2 COM
16	RL2 NO
15	RL1 COM
14	RL1 NO
13	RLO COM
12	RLO NO
11	N/A
10	N/A

**PETL-7066
PETL-7067**

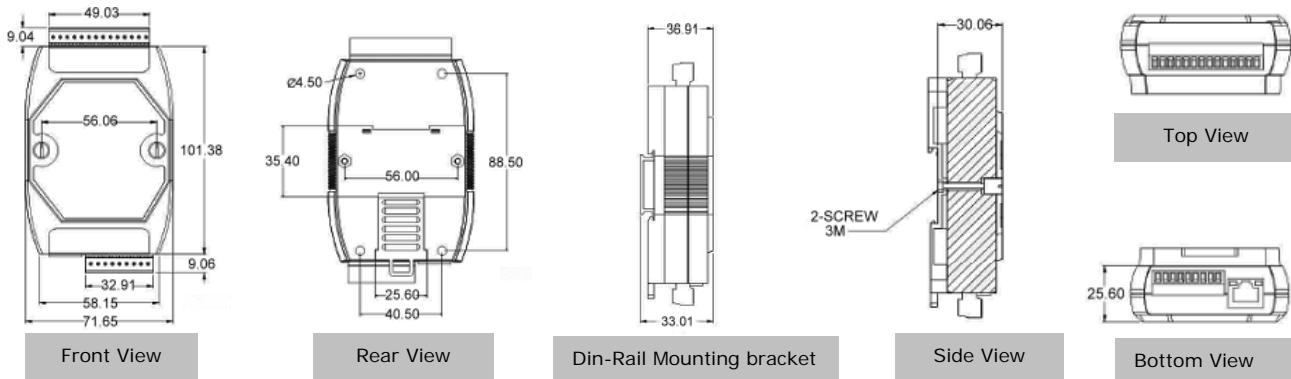Dimensions (Unit:mm)




Ordering Information

PETL-7042 CR (Available soon)	Ethernet module with PoE and 16-ch isolated open collector (sink) DO (RoHS)
PETL-7044 CR (Available soon)	Ethernet module with PoE, 8-ch isolated DI and 8-ch Isolated open collector (sink) DO (RoHS)
PETL-7050 CR (Available soon)	Ethernet module with PoE, 12-ch isolated DI and 6-ch isolated open collector (sink) DO (RoHS)
PETL-7051 CR (Available soon)	Ethernet module with PoE and 16-ch isolated DI (RoHS)
PETL-7052 CR (Available soon)	Ethernet module with PoE, 8-ch isolated DI and 8-ch open collector (source) DO (RoHS)
PETL-7053 CR (Available soon)	Ethernet module with PoE and 16-ch isolated dry-contact DI (RoHS)
PETL-7060 CR (NEW)	Ethernet module with PoE, 6-ch isolated DI and 6-ch Form A power relay (RoHS)
PETL-7065 CR (Available soon)	Ethernet module with PoE, 6-ch isolated DI and 6-ch PhotoMOS relay (RoHS)
PETL-7066 CR (Available soon)	Ethernet module with PoE and 8-ch PhotoMOS relay (RoHS)
PETL-7067 CR (Available soon)	Ethernet module with PoE and 8-ch Form A power relay (RoHS)

Accessories

NS-205 CR	Unmanaged 5-Port Industrial Ethernet Switch (RoHS)
NS-205PSE CR	Unmanaged Ethernet Switch with 4 PoE Ports and 1 RJ-45 Uplink (RoHS)
NS-205PSE-24V CR	Unmanaged 5-Port 10/100 Mbps PoE (PSE) Ethernet Switch; 24 Vdc Input (RoHS)
DIN-KA52F CR	24 V/1.04 A, 25 W Power Supply with DIN-Rail Mounting (RoHS)
DIN-KA52F-48 CR	48 V/0.52 A, 25 W Power Supply with Din-Rail Mounting (RoHS, for NS-205PSE)
GPSU06U-6	24 V/0.25 A (max) Power Supply

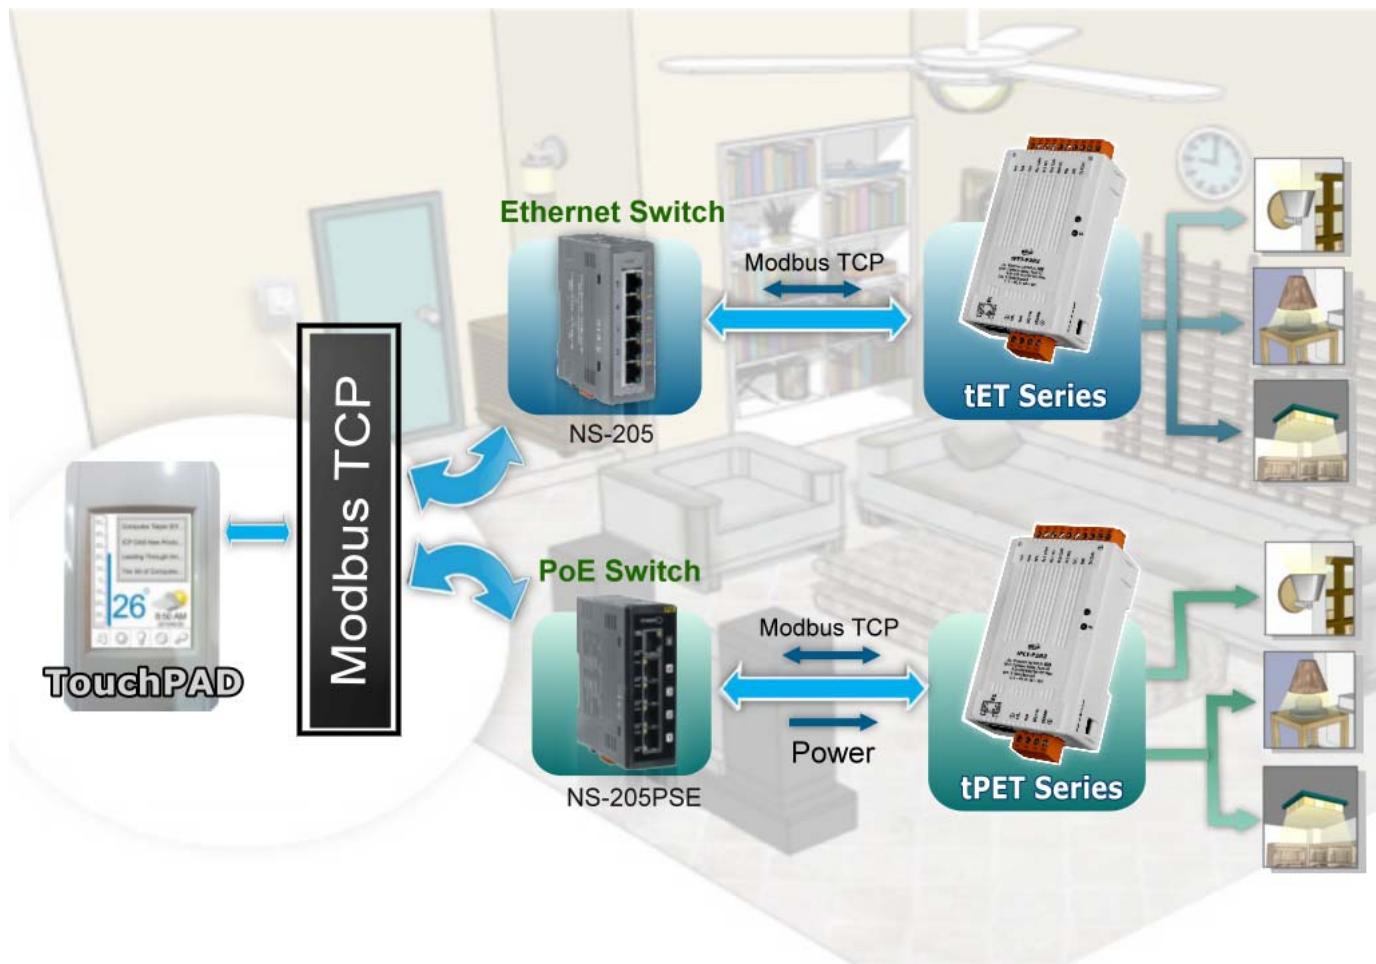NS-205 CR NS-205PSE CR NS-205PSE-24V CR DIN-KA52F CR DIN-KA52F-48 CR GPSU06U-6



● Selection Guide



tET/tPET Selection Guide

Model Name		Bus	Protocol	I/O Specification		
Ethernet	PoE			Isolation	DI	DO
tET-P6	tPET-P6	Ethernet 10/100 M	Modbus TCP	Yes	6-ch (Sink/Source)	-
tET-C4	tPET-C4			Yes	-	4-ch (NPN, Sink)
tET-A4	tPET-A4			Yes	-	4-ch (PNP, Source)
tET-P2C2	tPET-P2C2			Yes	2-ch (Sink/Source)	2-ch (NPN, Sink)
tET-P2A2	tPET-P2A2			Yes	2-ch (Sink/Source)	2-ch (PNP, Source)
tET-P2POR2	tPET-P2POR2			Yes	2-ch (Sink/Source)	2-ch Form A PhotoMos Relay
tET-P2R2	tPET-P2R2			Yes	2-ch (Sink/Source)	2-ch Form A Power Relay



Available soon

tET/tPET Series

Tiny Ethernet I/O modules

Features

- Cost-effective tiny Ethernet I/O modules (Modbus TCP/UDP slave)
- Contains a 32-bit MCU that efficiently handles network traffic
- 10/100 Base-TX Ethernet, RJ-45 x1
(Auto-negotiating, auto MDI/MDIX, LED Indicators)
- Includes redundant power inputs: PoE and DC input
- Supports TCP, UDP, HTTP, DHCP, BOOTP and TFTP protocols
- Supports UDP responder for device discovery
- Supports web configuration and firmware update via Ethernet
- Isolated Digital Input and Output
- Supports latched D/I and 32-bit low-speed counter functions
- Supports I/O pair-connection through the Ethernet
- Dual-watchdog with power-on and safe value
- Tiny form-factor with easy DIN-Rail mounting
- RoHS compliant with no Halogen
- Made from fire retardant materials (UL94-VO Level)
- Low power consumption (about 1.7 W only)



System Specifications

Modul	tET Series		tPET Series		
System					
CPU	32-bit MCU				
Dual Watchdog	Yes				
Communication					
Ethernet Port	10/100 Base-TX, 8-Pin RJ-45 x1, (Auto-negotiating, Auto-MDI/MDIX, LED indicator)	-	PoE (IEEE 802.3af, Class 1)		
LED Display					
S1	-	PoE Indicator (Green)			
	System indicator (Red)				
E1	Link/Act indicator (Green)				
	10/100 M indicator (Yellow)				
Mechanical					
Dimensions	52 mm x 27 mm x 98 mm				
Installation	DIN-Rail mounting				
Environment					
Operating Temperature	-25 °C ~ +75 °C				
Storage Temperature	-30 °C ~ +80 °C				
Humidity	10 ~ 90 % RH, non-condensing				
Power Requirements					
Power Input	-	PoE: IEEE 802.3af, Class 1			
	Terminal block: +12 ~ 48 V _{DC} (non-regulated)				
Power Consumption	0.04 A @ 24 V _{DC} for tET-P2R2	0.03 A @ 48 V _{DC} for tPET-P2R2			

I/O Specifications

Digital Input/Output Series





Models		
	tET-C4/tPET-C4	tET-A4/tPET-A4
Digital Output		
Output Channels	4	
Output Type (Module)	Sink, Open Collector (NPN)	Source, Open Collector (PNP)
Output Voltage	+5 V _{DC} ~ +30 V _{DC}	+10 V _{DC} ~ +40 V _{DC}
Max. Load Current	100 mA/channel at 25 °C Direct drive power relay module	650 mA/channel at 25 °C
Over-Voltage	+60 V _{DC}	+48 V _{DC}
Short Circuit Protection	-	Yes
Output Isolation	3750 Vrms	

Models			
	tET-P6/tPET-P6	tET-P2C2/tPET-P2C2	tET-P2A2/tPET-P2A2
Digital Input			
Input Channels	6	2	
Input Type (Device)	Wet Contact (Sink, Source)		
On Voltage Level	+10 V _{DC} ~ +50 V _{DC}		
Off Voltage Level	+4 V _{DC} max.		
Input Impedance	10 k Ohm		
Counters	Max. Count: 4,294,967,285 (32 bits)		
	Max. Input Frequency: 3.5 kHz (without filter)		
	Min. Pulse Width: 0.15 ms		
Oversupply Protection	+70 V _{DC}		
Isolation	3750 Vrms		
Digital Output			
Output Channels	-	2	
Output Type (Module)	-	Sink, Open Collector (NPN)	Source, Open Collector (PNP)
Output Voltage	-	+5 V _{DC} ~ +30 V _{DC}	+10 V _{DC} ~ +40 V _{DC}
Max. Load Current	-	100 mA/channel at 25 °C Direct drive power relay module	650 mA/channel at 25 °C
Over-Voltage	-	+60 V _{DC}	+48 V _{DC}
Short Circuit Protection	-	-	Yes
Output Isolation	-	3750 Vrms	


Digital Input/Relay Output Series

Models		
	tET-P2POR2/tPET-P2POR2	tET-P2R2/tPET-P2R2
Digital Input		
Input Channels	2	
Input Type (Device)	Wet Contact (Sink, Source)	
On Voltage Level	+10 V _{DC} ~ +50 V _{DC}	
Off Voltage Level	+4 V _{DC} max.	
Input Impedance	10 k Ohm	
	Max. Count: 4,294,967,285 (32 bits)	
Counters	Max. Input Frequency: 3.5 kHz (without filter)	
	Min. Pulse Width: 0.15 ms	
Overvoltage Protection	+70 V _{DC}	
Isolation	3750 Vrms	
Relay Output		
Output Channels	2	2
Output Type (Module)	PhotoMOS Relay, Form A	Power Relay, Form A (SPST N.O.)
Load Voltage	60 V _{DC} /V _{AC}	-
	60 V/1.0 A (Operating Temperature -25°C ~ -40°C)	-
Load Current	60 V/0.8 A (Operating Temperature +40°C ~ +60°C)	-
	60 V/0.7 A (Operating Temperature +60°C ~ +75°C)	-
Turn ON Time	1.3 ms (Typical)	-
Turn Off Time	0.1 ms (Typical)	-
Output Isolation	3000 Vrms	3000 Vrms
Output Voltage Range	-	250 V _{AC} /30 V _{DC}
Max. Load Current	-	5.0 A/channel at 25 °C
Operate Time	-	6 ms
Release Time	-	3 ms
Electrical Life (Resistive load)	VED	5 A 250 V _{AC} 30,000 ops (10 ops/minute) at 75 °C
	UL	5 A 30 V _{DC} 70,000 ops (10 ops/minute) at 75 °C
Mechanical Life	-	5 A 250 V _{AC} /30 V _{DC} 6,000 ops
	-	3 A 250 V _{AC} /30 V _{DC} 100,000 ops
Mechanical Life	-	20,000,000 ops. At no load (300 ops./ minute)

Pin Assignments

tET/tPET-C4 tET/tPET-A4		tET/tPET-C4 tET/tPET-A4		tET/tPET-P6		tET/tPET-P6		
E1	Link/Act 10/100 M	14	N/A	E1	Link/Act 10/100 M	14	N/A	
01	F.G.	13	N/A	01	F.G.	13	N/A	
02	N/A	12	N/A	02	N/A	12	N/A	
03	(R)+Vs	11	N/A	03	(R)+Vs	11	DI5	
04	(B)GND	10	DO3	04	(B)GND	10	DI4	
		09	DO2			09	DI3	
		08	DO1			08	DI2	
		07	DO0			07	DI1	
		06	DO.PWR			06	DI0	
		05	DO.GND			05	DI.COM	
tET/tPET-P2C2 tET/tPET-P2A2			tET/tPET-P2C2 tET/tPET-P2A2		tET/tPET-P2POR2 tET/tPET-P2P2		tET/tPET-P2POR2 tET/tPET-P2P2	
E1	Link/Act 10/100 M	14	N/A	E1	Link/Act 10/100 M	14	N/A	
01	F.G.	13	N/A	01	F.G.	13	N/A	
02	N/A	12	N/A	02	N/A	12	N/A	
03	(R)+Vs	11	DI1	03	(R)+Vs	11	RL1 COM	
04	(B)GND	10	DI0	04	(B)GND	10	RL1 NO	
		09	DI.COM			09	RLO COM	
		08	DO1			08	RLO NO	
		07	DO0			07	DI1	
		06	DO.PWR			06	DI0	
		05	DO.GND			05	DI.COM	

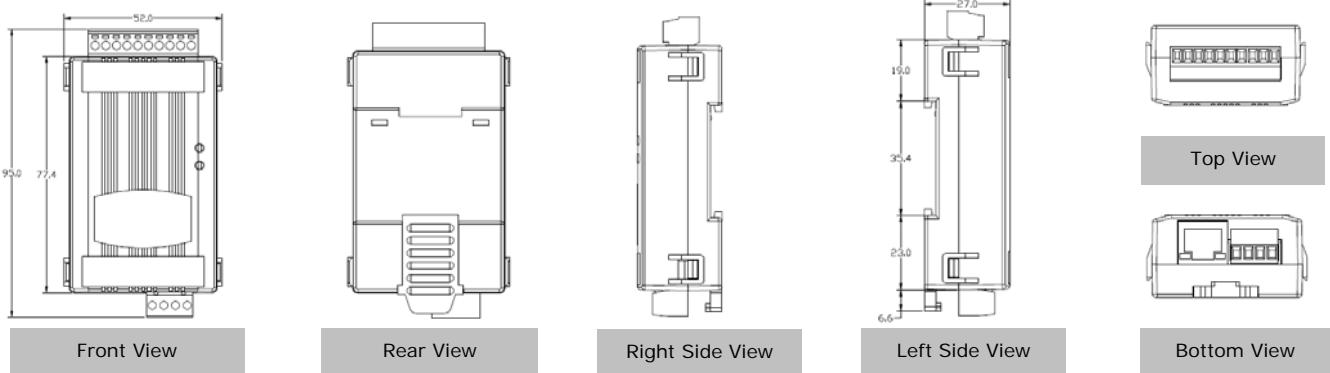Dimensions (Unit: mm)



Ordering Information

tET Series	
tET-P6 CR <small>(Available soon)</small>	Tiny Ethernet module with 6-ch DI (RoHS)
tET-C4 CR <small>(Available soon)</small>	Tiny Ethernet module with 4-ch DO (NPN, Sink) (RoHS)
tET-A4 CR <small>(Available soon)</small>	Tiny Ethernet module with 4-ch DO (PNP, Source) (RoHS)
tET-P2C2 CR <small>(Available soon)</small>	Tiny Ethernet module with 2-ch DI and 2-ch DO (NPN, Sink) (RoHS)
tET-P2A2 CR <small>(Available soon)</small>	Tiny Ethernet module with 2-ch DI and 2-ch DO (PNP, Source) (RoHS)
tET-P2POR2 CR <small>(Available soon)</small>	Tiny Ethernet module with 2-ch DI and 2-ch Form A PhotoMos relay (RoHS)
tET-P2R2 CR <small>(Available soon)</small>	Tiny Ethernet module with 2-ch DI and 2-ch Form A relay (RoHS)
tPET Series	
tPET-P6 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, and 6-ch DI (RoHS)
tPET-C4 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, and 4-ch DO (NPN, Sink) (RoHS)
tPET-A4 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, and 4-ch DO (PNP, Source) (RoHS)
tPET-P2C2 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, 2-ch DI and 2-ch DO (NPN, Sink) (RoHS)
tPET-P2A2 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, 2-ch DI and 2-ch DO (PNP, Source) (RoHS)
tPET-P2POR2 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, 2-ch DI and 2-ch Form A PhotoMos relay (RoHS)
tPET-P2R2 CR <small>(Available soon)</small>	Tiny Ethernet module with PoE, 2-ch DI and 2-ch Form A power relay (RoHS)





Accessories



NS-205 CR	Unmanaged 5-Port Industrial Ethernet Switch (RoHS)
NS-205PSE CR	Unmanaged Ethernet Switch with 4 PoE Ports and 1 RJ-45 Uplink (RoHS)
NS-205PSE-24V CR	Unmanaged 5-Port 10/100 Mbps PoE (PSE) Ethernet Switch; 24 Vdc Input (RoHS)
DIN-KA52F CR	24 V/1.04 A, 25 W Power Supply with DIN-Rail Mounting (RoHS)
DIN-KA52F-48 CR	48 V/0.52 A, 25 W Power Supply with Din-Rail Mounting (RoHS, for NS-205PSE)
GPSU06U-6	24 V/0.25 A (max) Power Supply
NS-205 CR	
NS-205PSE CR	
NS-205PSE-24V CR	
DIN-KA52F CR	
DIN-KA52F-48 CR	
GPSU06U-6	

Input Wiring

PETL-7044/7050/7051/7052/7060/7065
t(P)ET-P6/t(P)ET-P2C2/t(P)ET-P2A2
t(P)ET-P2POR2/t(P)ET-P2R2

PETL-7053




Digital Input	Readback as 1	Readback as 0
Sink	+10 ~ +50 Vdc	OPEN or <4 Vdc
		
Source	+10 ~ +50 Vdc	OPEN or <4 Vdc
		


Input Type	Readback as 1	Readback as 0
Dry Contact	Relay Off	Relay On
		

Output Wiring

PETL-7042/7044/7050
t(P)ET-C4/t(P)ET-P2C2



PETL-7052
t(P)ET-A4/t(P)ET-P2A2

Output Type	Readback as 1	Readback as 0
Drive Relay	Relay ON	Relay Off
		
Resistance Load		

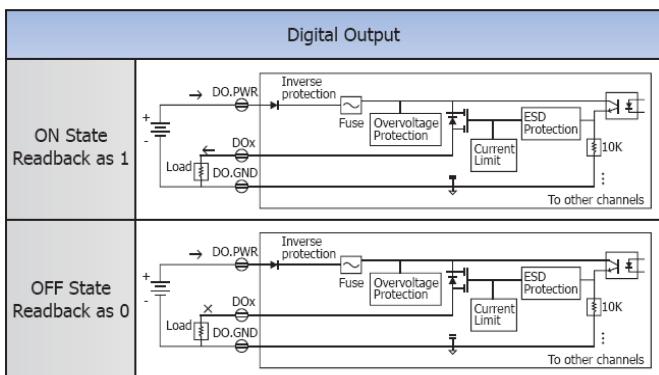


PETL-7060/7067
t(P)ET-P2R2

PETL-7065/7066
t(P)ET-P2POR2

Digital Output	Readback as 1	Readback as 0
Relay Output	Relay On	Relay Off
		

Output Type	Readback as 1	Readback as 0
From A Relay Contact	Relay On	Relay Off
		

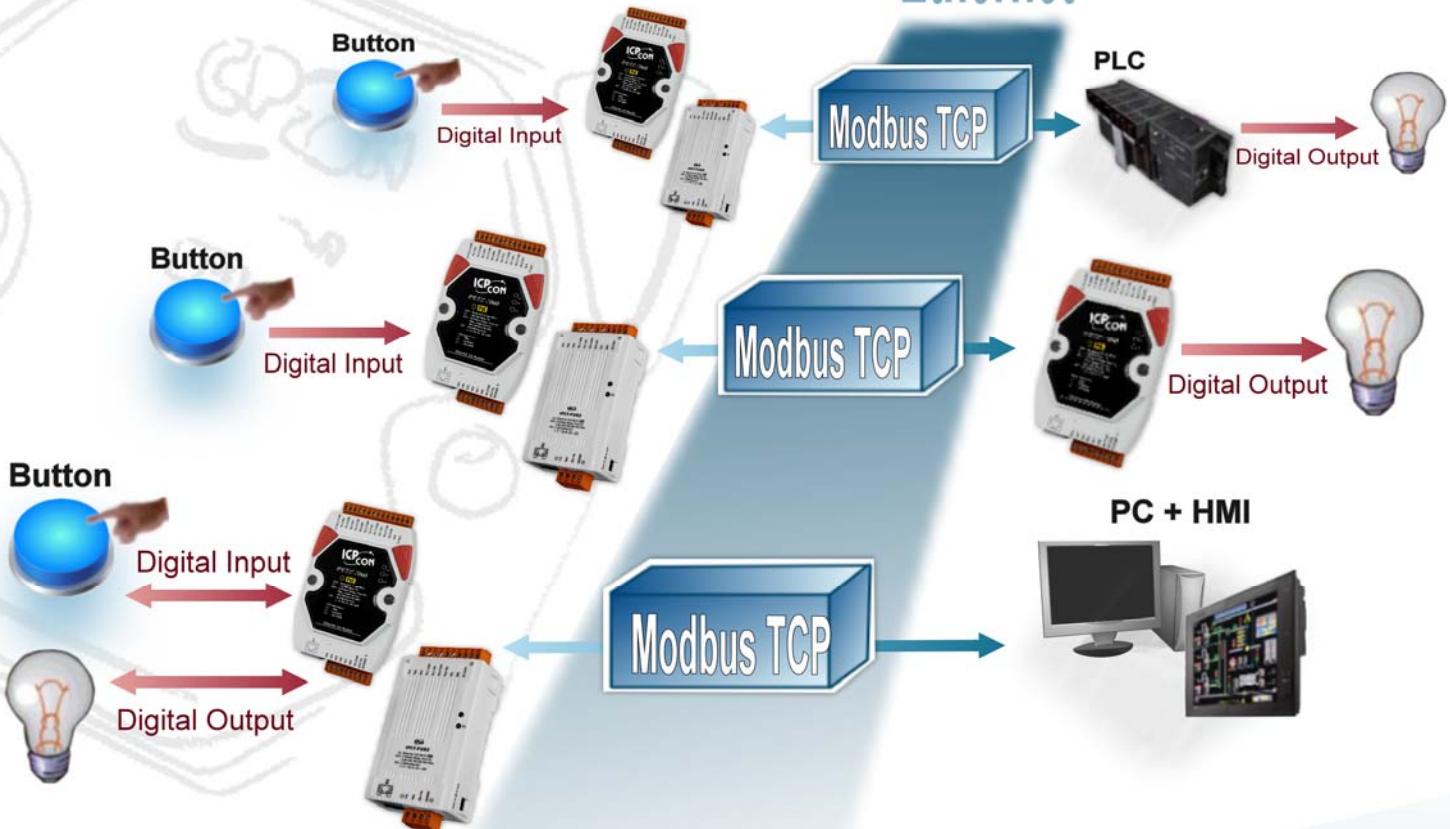Ethernet



ICP DAS CO., LTD

Taiwan

Website: <http://www.icpdas.com>
E-mail: sales @icpdas.com
TEL: 886-3-597-3366 FAX: 886-3-597-3733

China

Website: <http://www.icpdas.com.cn>
E-mail: sales_sh @icpdas.com.cn
TEL: 86-21-6247-1722 FAX: 86-21-6247-1725

Europe

Website: <http://www.icpdas-europe.com>
E-mail: info @icpdas-europe.com
TEL: +49(0)7121-14324-0 FAX: +49(0)7121-14324-90

USA

Website: <http://www.icpdas-usa.com>
E-mail: sales @icpdas-usa.com
TEL: 1-310-517-9888 x101 FAX: 1-310-517-0998

Local Distributor